



NORWICK®
诺威克



RENQIU YINUO WELDING EQUIPMENT CO.,LTD

Add:yangcun Indsrial Zone Lvongbao

Town,Renqiu,Hebei,China

Tel:0086-317-2638157

Fax:0086-317-2838157

Web:www.rqyinuo.com

E-mail:zyd@rqyinuo.com zyp@rqyinuo.com

任丘市一诺焊接设备有限公司

RENQIU YINUO WELDING EQUIPMENT CO.,LTD

全国免费客服热线：**400-966-3700**

地址：河北省任丘市吕公堡镇杨村工业区

电话：0086-317-2638157

传真：0086-317-2838157

网址：WWW.RQYINUO.COM

MIG/TIG/PLASMA

产品目录

TYPE SELECTING MANUAL OF PRODUCT

公司简介

COMPANY PROFILE

任丘市一诺焊接设备有限公司专业生产MIG/MAG/TIG/PLASMA焊接切割 torch 及配件的耗材配件, 快速接头插座等焊机配件。

Renqiu Yi Nuo Welding Equipment Co., Ltd Professional Manufacturing for MIG/TIG/PLASMA Welding & Cutting Torch and Consumables, Quick Connector set for Welding machine etc.

公司产品主要特点:

Ours Products Main Feature:

- 产品均符合EN60974-7标准
- Approved EN 60974-7 CE Standards
- 焊枪手柄均采用人体工学设计, 握感舒适, 双色包胶, 耐磨, 防滑, 重复耐用!
- Torch Holder Using Human Engineering Design, Comfortable Holding with 2 Color Rubber Coated, Abrasive Resistance, Anti-slip, Attractive and Durable!
- 焊枪电缆全部采用耐燃, 耐弯材料, 电缆支撑采用柔性材料, 有良好的支撑性, 有效保护电缆
- Torch Cable Using Durable & Anti-fire Material, Cable with Good Protection by Flexible Materials Supported
- 整枪出厂前均经过焊接/切割测试, 保证客户直接安装使用操作
- Torch Must be Finished Complete Welding/Cutting Test before Loading, Ensure User's Safety Operation

本样本所涉及的产品可以由本公司进行修改或替换, 本文中所述及的下列品牌和商标是属于各注册人的专有财产, 本样本中所涉及的产品并非原厂产品, 而是适合原厂产品的可换配件, 所有的参照号码仅用于方便搜索。

The articles stated in the present catalogue are subjected to modifications or substitution without prior notice. The brand names and trade marks listed under in this catalogue are the registered trade marks of the proper owner and remain exclusive property of the respective owners. The parts shown in this catalogue are not genuine parts of the respective trade mark, they are interchangeable parts made to fit the original equipments. All the Reference codes are only for convenient research.

BERNARD®
BINZEL®
ESAB®
FRONIUS®
LINCOLN®

MILLER®
PANASONIC®
SAF®
TREGASKISS®
TWECO®

THERMADYNE®
REHM®
KEMPP®
OTC®

目录

CONTENTS

欧式 (遥控系列) 焊枪及配件 European Series (Remote) Torch and Consumables MIG15/24/25/34/40/101D	1-8	TIG系列焊枪 (焊枪及配件) TIG Torch Series (Consumables) WP-3/25/34/25/17/18/26	67-70
欧式 (枪头可360度旋转) 万向系列焊枪及配件 European Series (360° Angle Rotated Adjustment Torch Head) Torch and Consumables MIG15/24/25/34	9-13	TIG系列焊枪 (普通喷嘴和配件材料) (普通) TIG Torch Series (Glass Nozzle & Consumables) (Partic Kit) WP-3/25/34/25/17/18/26	71-76
欧式 (远程控制/电流/电压调节) 系列焊枪及配件 European Series (Remote Control / Current/Voltage Control) Torch and Consumables MIG15/24/25/34	14-18	等离子 (手工/自动) 等离子割炬及配件 PLASMA (Manual / Automatic) Cutting Series Torch & Consumables PT 30	77-78
日式系列焊枪及配件 PA Torch Series (Consumables) P200/350/500	19-21	等离子 (手工/自动) 等离子割炬及配件 PLASMA (Manual / Automatic) Cutting Series Torch & Consumables PT 30	80
OTC®系列焊枪及配件 OTC® Torch Series (Consumables) 200A/350A/500A	22-24	SG 51	81
伊萨系列焊枪及配件 ESAB® Torch Series (Consumables) P5F 205A/355A/405/505	25-28	SG 55	82
伊萨系列焊枪及配件 ESAB® Torch Series (Consumables) 8ND: 200A/300A/400A	29-35	AG 60	83
特威克系列焊枪及配件 TWSC® Torch Series (Consumables) TW-180A/200A/300A/400A/500A	36-55	CS50/70/100/150	84-91
米勒系列配件 MILLER® Series (Consumables)	56	PT20/40/60/80/100	92-101
TREGASKISS® Series (Consumables)	57-60	AG1/101/141/151	102-109
FRONIUS® Series (Consumables)	61-62	NW62/82/102	110-113
雷诺系列配件 RENOL® Series (Consumables)	63-64	NW45/65/85/105	116-123
雷诺系列配件 RENOL® Series (Consumables)	65	雷诺系列配件 RENOL® Series (Consumables)	124-125
雷诺系列配件 RENOL® Series (Consumables)	66	雷诺系列配件 RENOL® Series (Consumables)	126-129
雷诺系列配件 RENOL® Series (Consumables)		雷诺系列配件 RENOL® Series (Consumables)	130
雷诺系列配件 RENOL® Series (Consumables)		雷诺系列配件 RENOL® Series (Consumables)	131

MIG TORCH AND CONSUMABLES



WELCOME TO JOIN US

MIG TORCH 15

任丘市一诺焊接设备有限公司
Ranqu Yituo Welding Equipment Co., Ltd



TECHNICAL DATA (技术参数)
RATING (额定值): 150A Co2
150A MIXED GASES 混合气体
DUTY CYCLE (负载率): 60%
WIRE SIZE (适用焊丝直径): 0.6-1.0mm



EURO

焊枪头: COMPLETE TORCH (1Pcs/Box)			
15A焊枪	Copper wire 12-14 15mm ²	L 3.0METERS	002.0449
MIG Torch 15A, EURO	Copper wire 12-14 15mm ²	L 4.0METERS	002.0450
	Copper wire 12-14 15mm ²	L 5.0METERS	002.0451

枪管/喷嘴 SWAN NECK/TORCH HEAD (2Pcs/Pack)		
	62#黄铜 (62# Brass)	Swan Neck + TIP HOLDER 002.0009

导电嘴 TIP HOLDER (20Pcs/Pack)		
	59#黄铜 (59# Brass)	L42.0mm, M6, M003 LH 002.0078

导电嘴 CONTACT TIP (20Pcs/Pack)			
	紫铜 (E-Cu)	MIG25mm, Ø5.5-5.8-6.0mm-0.8mm Welding wire	140.0008
		MIG25mm, Ø5.5-5.8-6.0mm-0.8mm Welding wire	140.0059
		MIG25mm, Ø5.5-5.8-6.0mm-0.8mm Welding wire	140.0177
		MIG25mm, Ø5.5-5.8-6.0mm-1.0mm Welding wire	140.0253
		MIG25mm, Ø5.5-5.8-6.0mm-1.2mm Welding wire	140.0178
	紫铜 (E-Cu for AL)	MIG25mm, Ø7.5-7.8-8.0mm-0.8mm AL Welding wire	141.0002
		MIG25mm, Ø5.5-5.8-6.0mm-1.0mm AL Welding wire	141.0007
		MIG25mm, Ø5.5-5.8-6.0mm-1.2mm AL Welding wire	141.0017
		MIG25mm, Ø6.0mm-0.8mm Welding wire	140.0855
		MIG25mm, Ø6.0mm-0.8mm Welding wire	140.0062
	铜铁合金 (CuCrZr)	MIG25mm, Ø6.0mm-1.0mm Welding wire	140.0256
		MIG25mm, Ø6.0mm-1.2mm Welding wire	140.0276

喷嘴 NOZZLE (10Pcs/Pack)			
	铜/黄铜 (Copper/Brass)	柱形喷嘴 Cylindrical L33MM, Ø16.0MM, Ø 1.0-1.2MM	145.0041
	铜/黄铜 (Copper/Brass)	锥形喷嘴 Conical L33MM, Ø12.0MM, Ø 1.0-1.2MM	145.0075
	铜/黄铜 (Copper/Brass)	尖形喷嘴 Apical L33MM, Ø9.5MM, Ø 1.0-1.2MM	145.0123

送丝软管 LINER (1Pcs/Pack)			
	铜丝 (steel wire)	送丝软管 Blue Ø4X1.5mm L3.5METERS Ø0.6-0.8mm	124.0011
	铜丝 (steel wire)	送丝软管 Blue Ø4X1.5mm L4.5METERS Ø0.6-0.8mm	124.0012
	铜丝 (steel wire)	送丝软管 Blue Ø4X1.5mm L5.5METERS Ø0.6-0.8mm	124.0015



TECHNICAL DATA (技术参数)
RATING(额定值): 250A Cu-2
220A MIXED GASES 混合气体
DUTY CYCLE(额定周期): 60%
WIRE SIZE(适用焊丝直径): Ø 0.8-1.2mm



EURO

焊枪组 COMPLETE TORCH (1Pcs/Box)			
铜线 (Copper wire)	16-18-25mm²	L 3.0METERS	012.0103
铜线 (Copper wire)	16-18-25mm²	L 4.0METERS	012.0104
铜线 (Copper wire)	16-18-25mm²	L 5.0METERS	012.0105

枪颈/枪管 SWAN NECK (2Pcs/Pack)		
	内嵌芯 (In: 62#BRASS)	012.0001

选杆/导电嘴座 TIP HOLDER (20Pcs/Pack)		
	59#黄铜 (59# Brass)	L26.0mm, M6 142.0003

导电嘴 CONTACT TIP (20Pcs/Pack)			
	紫铜 (E-Cu)	MG28mm, Ø6.5-7.5-8.0mm-0.8mm Welding wire	140.0051
		MG28mm, Ø6.5-7.5-8.0mm-0.8mm Welding wire	140.0069
		MG28mm, Ø6.5-7.5-8.0mm-1.0mm Welding wire	140.0342
		MG28mm, Ø6.5-7.5-8.0mm-1.2mm Welding wire	140.0379
	紫铜 (E-Cu for AL)	MG28mm, Ø6.5-7.5-8.0mm-0.8mm AL WELDING WIRE	141.0001
		MG28mm, Ø6.5-7.5-8.0mm-1.0mm AL WELDING WIRE	141.0006
		MG28mm, Ø6.5-7.5-8.0mm-1.2mm AL WELDING WIRE	141.0010
		MG28mm, Ø8.0mm-0.8mm Welding wire	140.0054
	青铜铜 (CuCrZr)	MG28mm, Ø8.0mm-1.0mm Welding wire	140.0245
		MG28mm, Ø8.0mm-1.2mm Welding wire	140.0382

喷嘴 NOZZLE (5Pcs/Pack)			
	紫铜/黄铜 (Copper/Brass)	FR2028Cylindrical L57MM, Ø19MM, ±12-15MM	145.0047
	紫铜/黄铜 (Copper/Brass)	FR2028Conical L63MM, Ø12.5MM, ±12-15MM	145.0080
	紫铜/黄铜 (Copper/Brass)	FR2028Tapered L63MM, Ø19MM, ±12-15MM	145.0128

分流器 GAS DIFFUSER (20Pcs/Pack)		
	塑料 (DMC)	012.0183
	陶瓷 (Ceramic)	012.0183.1

送丝管 LINER (1Pcs/Pack)			
	铜线 (steel wire): 红色绝缘层 Red liner	Ø4.2X1.8mm L 3.5METERS Ø1.0-1.2mm	124.0026-2
	铜线 (steel wire): 红色绝缘层 Red liner	Ø4.2X1.8mm L 4.5METERS Ø1.0-1.2mm	124.0033-2
	铜线 (steel wire): 红色绝缘层 Red liner	Ø4.2X1.8mm L 5.5METERS Ø1.0-1.2mm	124.0025-2



TECHNICAL DATA (技术参数)
RATING(额定值): 230A Cu-2
200A MIXED GASES 混合气体
DUTY CYCLE(额定周期): 60%
WIRE SIZE(适用焊丝直径): 0.8-1.2mm



EURO

焊枪组 COMPLETE TORCH (1Pcs/Box)			
铜线 (Copper wire)	16-18-25mm²	L 3.0METERS	004.0312
铜线 (Copper wire)	16-18-25mm²	L 4.0METERS	004.0313
铜线 (Copper wire)	16-18-25mm²	L 5.0METERS	004.0314

枪颈/枪管 SWAN NECK (2Pcs/Pack)		
	62#黄铜 (62# Brass)	Swan Neck 004.0012

导电嘴座 TIP HOLDER (20Pcs/Pack)		
	紫铜 (COPPER)	L35.0mm, M6 142.0001
	59#黄铜 (59# Brass)	L35.0mm, M6 142.0001

导电嘴 CONTACT TIP (20Pcs/Pack)			
	紫铜 (E-Cu)	MG28mm, Ø6.5-7.5-8.0mm-0.8mm Welding wire	140.0051
		MG28mm, Ø6.5-7.5-8.0mm-0.8mm Welding wire	140.0169
		MG28mm, Ø6.5-7.5-8.0mm-1.0mm Welding wire	140.0242
		MG28mm, Ø6.5-7.5-8.0mm-1.2mm Welding wire	140.0379
	紫铜 (E-Cu for AL)	MG28mm, Ø6.5-7.5-8.0mm-0.8mm AL WELDING WIRE	141.0001
		MG28mm, Ø6.5-7.5-8.0mm-1.0mm AL WELDING WIRE	141.0006
		MG28mm, Ø6.5-7.5-8.0mm-1.2mm AL WELDING WIRE	141.0010
		MG28mm, Ø8.0mm-0.8mm Welding wire	140.0054
	青铜铜 (CuCrZr)	MG28mm, Ø8.0mm-1.0mm Welding wire	140.0245
		MG28mm, Ø8.0mm-1.2mm Welding wire	140.0382

喷嘴 NOZZLE (5Pcs/Pack)			
	紫铜/黄铜 (Copper/Brass)	FR2028Cylindrical L57MM, Ø19MM, ±12-15MM	145.0047
	紫铜/黄铜 (Copper/Brass)	FR2028Conical L57MM, Ø12.5MM, ±12-15MM	145.0075
	紫铜/黄铜 (Copper/Brass)	FR2028Tapered L57MM, Ø19MM, ±12-15MM	145.0124

送丝管 LINER (1Pcs/Pack)		
	铜线 (steel wire): 红色绝缘层 Red liner	Ø4.2X1.8mm L 3.5METERS Ø1.0-1.2mm 124.0026-2
	铜线 (steel wire): 红色绝缘层 Red liner	Ø4.2X1.8mm L 4.5METERS Ø1.0-1.2mm 124.0031-2
	铜线 (steel wire): 红色绝缘层 Red liner	Ø4.2X1.8mm L 5.5METERS Ø1.0-1.2mm 124.0025-2



TECHNICAL DATA (技术参数)
RATING (额定值): 270A Co2
24GA MIXED GASES 混合气体
DUTY CYCLE (负载率): 60%
WIRE SIZE (适用焊丝直径): 0.8-1.2mm



EURO

焊枪组 COMPLETE TORCH (1Pcs/Box)			
铜丝 (Copper wire)	25-30mm²	L 3.0METERS	018.0062
铜丝 (Copper wire)	25-30mm²	L 4.0METERS	018.0063
铜丝 (Copper wire)	25-30mm²	L 5.0METERS	018.0064

枪颈/枪管 SWAN NECK (2Pcs/Pack)		
	铜芯 (In.52#BRASS)	018.0001

连杆/导电嘴座 TIP HOLDER (20Pcs/Pack)		
	59#黄铜 (59# Brass)	L22.0mm, M8 142.0082
	59#黄铜 (59# Brass)	L22.0mm, M6 142.0007

导电嘴 CONTACT TIP (20Pcs/Pack)			
	紫铜 (E-Cu)	MX28mm, Ø6.5-7.5-8.0mm=1.0mm Welding wire	140.0342
		MX28mm, Ø6.5-7.5-8.0mm=1.2mm Welding wire	140.0379
		MX28mm, Ø6.5-7.5-8.0mm=1.6mm Welding wire	140.0555
	铜镍铜 (CuCrZr)	MX28mm, Ø8.0mm=1.0mm Welding wire	140.0345
		MX28mm, Ø8.0mm=1.2mm Welding wire	140.0382
		MX28mm, Ø8.0mm=1.6mm Welding wire	140.0558
	紫铜 (E-Cu)	MX30mm, Ø8.5-10.0mm=1.0mm Welding wire	140.0313
		MX30mm, Ø8.5-10.0mm=1.2mm Welding wire	140.0442
		MX30mm, Ø8.5-10.0mm=1.6mm Welding wire	140.0587
	铜镍铜 (CuCrZr)	MX30mm, Ø10.0mm=1.0mm Welding wire	140.0316
		MX30mm, Ø10.0mm=1.2mm Welding wire	140.0445
		MX30mm, Ø10.0mm=1.6mm Welding wire	140.0590
		MX30mm, Ø11.0mm=2.0mm Welding wire	140.0679

喷嘴 NOZZLE (5Pcs/Pack)		
	铜丝/黄铜 (Copper/Brass)	145.0051
	17.0MM, Ø19.0MM x 2.0-2.5MM	145.0059
	17.0MM, Ø16.0MM x 2.0-2.5MM	145.0132

分流器 GAS DIFFUSER (20Pcs/Pack)		
	塑料 (DMC)	018.0116
	陶瓷 (Ceramic)	018.0141

证丝管 LINER (1Pcs/Pack)			
	铜丝 (Steel wire)	红色绝缘层 Red liner	Ø4.2X1.0mm L 3.5METERS Ø1.0-1.2mm 134.0026-2
	铜丝 (Steel wire)	红色绝缘层 Red liner	Ø4.2X1.0mm L 4.5METERS Ø1.0-1.2mm 134.0031-2
	铜丝 (Steel wire)	红色绝缘层 Red liner	Ø4.2X1.0mm L 5.5METERS Ø1.0-1.2mm 134.0035-2



TECHNICAL DATA (技术参数)
RATING (额定值): 300A Co2
27GA MIXED GASES 混合气体
DUTY CYCLE (负载率): 60%
WIRE SIZE (适用焊丝直径): 0.8-1.2mm



EURO

焊枪组 COMPLETE TORCH (1Pcs/Box)			
铜丝 (Copper wire)	25-30mm²	L 3.0METERS	014.0143
铜丝 (Copper wire)	25-30mm²	L 4.0METERS	014.0144
铜丝 (Copper wire)	25-30mm²	L 5.0METERS	014.0145

枪颈/枪管 SWAN NECK (2Pcs/Pack)		
	铜芯 (In.52#BRASS)	998.0091

连杆/导电嘴座 TIP HOLDER (20Pcs/Pack)		
	59#黄铜 (59# Brass)	L28.0mm, M8 142.0020
	59#黄铜 (59# Brass)	L26.0mm, M6 142.0005

导电嘴 CONTACT TIP (20Pcs/Pack)			
	紫铜 (E-Cu)	MX28mm, Ø6.5-7.5-8.0mm=0.8mm Welding wire	140.0051
		MX28mm, Ø6.5-7.5-8.0mm=0.9mm Welding wire	140.0129
		MX28mm, Ø6.5-7.5-8.0mm=1.0mm Welding wire	140.0242
	铜镍铜 (CuCrZr)	MX28mm, Ø6.5-7.5-8.0mm=1.2mm Welding wire	140.0379
		MX28mm, Ø8.0mm=0.8mm Welding wire	140.0054
		MX28mm, Ø8.0mm=1.0mm Welding wire	140.0245
	紫铜 (E-Cu)	MX30mm, Ø8.0mm=1.0mm Welding wire	140.0392
		MX30mm, Ø8.5-10.0mm=0.8mm Welding wire	140.0114
		MX30mm, Ø8.5-10.0mm=1.0mm Welding wire	140.0313
	铜镍铜 (CuCrZr)	MX30mm, Ø8.5-10.0mm=1.2mm Welding wire	140.0442
		MX30mm, Ø10.0mm=0.8mm Welding wire	140.0117
		MX30mm, Ø10.0mm=1.0mm Welding wire	140.0316
		MX30mm, Ø10.0mm=1.2mm Welding wire	140.0445

喷嘴 NOZZLE (5Pcs/Pack)		
	铜丝/黄铜 (Copper/Brass)	145.0045
	17.0MM, Ø19.0MM x 2.0-2.5MM	145.0078
	17.0MM, Ø16.0MM x 2.0-2.5MM	145.0126

分流器 GAS DIFFUSER (20Pcs/Pack)		
	塑料 (DMC)	014.0261
	陶瓷 (Ceramic)	014.0033

证丝管 LINER (1Pcs/Pack)			
	铜丝 (Steel wire)	黄色绝缘层 Red liner	Ø4.8X2.0mm L 3.5METERS Ø1.2-1.6mm 134.0041-1
	铜丝 (Steel wire)	黄色绝缘层 Red liner	Ø4.8X2.0mm L 4.5METERS Ø1.2-1.6mm 134.0041-2
	铜丝 (Steel wire)	黄色绝缘层 Red liner	Ø4.8X2.0mm L 5.5METERS Ø1.2-1.6mm 134.0041-3



TECHNICAL DATA (技术参数)

RATING(额定值): 180A Cu-2

95/0A MIXED GASES 混合气体

DUTY CYCLE(负载率): 60%

WIRE SIZE(适用焊丝直径): 1.0-2.4mm



EURO

焊枪组 COMPLETE TORCH (1Pcs/Box)		
铜丝 (Copper wire) 1.0-1.0mm	长度 3.0M (L 3.0METERS)	015.0029
铜丝 (Copper wire) 1.40-1.6mm	长度 4.0M (L 4.0METERS)	015.0032
铜丝 (Copper wire) 1.60-1.8mm	长度 5.0M (L 5.0METERS)	015.0034

枪把/枪管 SWAN NECK (2Pcs/Pack)		
	枪把 (In 52 Pcs/Pack)	015.0001

连杆/导电嘴座 TIP HOLDER (20Pcs/Pack)		
	59#黄铜 (59# Brass)	143.00mm, M8 142.0021

导电嘴 CONTACT TIP (20Pcs/Pack)		
	紫铜 (E-Cu)	M8X30mm, Ø10.0mm=1.0mm Welding wire 140.0313
		M8X30mm, Ø10.0mm=1.2mm Welding wire 140.0442
		M8X30mm, Ø10.0mm=1.6mm Welding wire 140.0587
		M8X30mm, Ø10.0mm=1.8mm Welding wire 140.0616
	银铜 (Cu/CuZn)	M8X30mm, Ø10.0mm=1.2mm Welding wire 140.0445
		M8X30mm, Ø10.0mm=1.6mm Welding wire 140.0590
		M8X30mm, Ø10.0mm=1.8mm Welding wire 140.0616
		M8X30mm, Ø10.0mm=2.4mm Welding wire 140.0679

喷嘴 NOZZLE (5Pcs/Pack)		
	紫铜/黄铜 (Copper/Brass)	柱形喷嘴 Cylindrical 130.0MM, Ø10.0MM, Ø 2.0-2.5MM 145.0046
		锥形喷嘴 Conical 130.0MM, Ø10.0MM, Ø 2.0-2.5MM 145.0079
		尖形喷嘴 Tapered 130.0MM, Ø10.0MM, Ø 2.0-2.5MM 145.0127

分流器 GAS DIFFUSER (20Pcs/Pack)		
	塑料 (DMC)	015.0021

送丝管 LINER (1Pcs/Pack)		
	铜丝 (Steel wire) 黑色内涂层 Black Liner	Ø4.3X2.4mm L 3.5METERS Ø1.2-1.6mm 124.0040-1
	铜丝 (Steel wire) 黑色内涂层 Black Liner	Ø4.3X2.4mm L 4.5METERS Ø1.2-1.6mm 124.0040-2
	铜丝 (Steel wire) 黑色内涂层 Black Liner	Ø4.3X2.4mm L 5.5METERS Ø1.2-1.6mm 124.0040-3



TECHNICAL DATA (技术参数)

RATING(额定值): 500A Cu-2

95/0A MIXED GASES 混合气体

DUTY CYCLE(负载率): 100%

WIRE SIZE(适用焊丝直径): 1.0-2.4mm



EURO

焊枪组 COMPLETE TORCH (1Pcs/Box)		
铜丝 (Copper wire) 1.0mm	长度 3.0METERS	034.0160
铜丝 (Copper wire) 1.4mm	长度 4.0METERS	034.0161
铜丝 (Copper wire) 1.6mm	长度 5.0METERS	034.0162

枪把/枪管 SWAN NECK (2Pcs/Pack)		
	枪把 (In 52 Pcs/Pack)	034.0001

连杆/导电嘴座 TIP HOLDER (20Pcs/Pack)		
	59#黄铜 (59# Brass)	125.0mm, M8 142.0022
	59#黄铜 (59# Brass)	125.0mm, M6 142.0008

导电嘴 CONTACT TIP (20Pcs/Pack)		
	紫铜 (E-Cu)	M8X30mm, Ø10.0mm=1.0mm Welding wire 140.0342
		M8X30mm, Ø10.0mm=1.2mm Welding wire 140.0379
		M8X30mm, Ø10.0mm=1.6mm Welding wire 140.0555
		M8X30mm, Ø10.0mm=1.8mm Welding wire 140.0345
	银铜 (Cu/CuZn)	M8X30mm, Ø10.0mm=1.2mm Welding wire 140.0382
		M8X30mm, Ø10.0mm=1.6mm Welding wire 140.0558
		M8X30mm, Ø10.0mm=1.8mm Welding wire 140.0313
		M8X30mm, Ø10.0mm=2.4mm Welding wire 140.0442
	紫铜 (E-Cu)	M8X30mm, Ø10.0mm=1.6mm Welding wire 140.0587
		M8X30mm, Ø10.0mm=1.8mm Welding wire 140.0316
		M8X30mm, Ø10.0mm=1.2mm Welding wire 140.0445
		M8X30mm, Ø10.0mm=1.6mm Welding wire 140.0590
	银铜 (Cu/CuZn)	M8X30mm, Ø10.0mm=2.4mm Welding wire 140.0679
		M8X30mm, Ø10.0mm=1.6mm Welding wire 140.0587
		M8X30mm, Ø10.0mm=1.8mm Welding wire 140.0316
		M8X30mm, Ø10.0mm=1.2mm Welding wire 140.0445

喷嘴 NOZZLE (5Pcs/Pack)		
	紫铜/黄铜 (Copper/Brass)	柱形喷嘴 Cylindrical 175.0MM, Ø13.0MM, Ø 2.0-2.5MM 145.0051
		锥形喷嘴 Conical 175.0MM, Ø13.0MM, Ø 2.0-2.5MM 145.0085
		尖形喷嘴 Tapered 175.0MM, Ø13.0MM, Ø 2.0-2.5MM 145.0132

分流器 GAS DIFFUSER (20Pcs/Pack)		
	塑料 (DMC)	030.0145
	陶瓷 (Ceramic)	030.0190

送丝管 LINER (1Pcs/Pack)		
	铜丝 (Steel wire) 无涂层 Black Liner	Ø4.2X1.8mm L 3.5METERS Ø1.2-1.6mm 52451-3
	铜丝 (Steel wire) 无涂层 Black Liner	Ø4.2X1.8mm L 4.5METERS Ø1.2-1.6mm 52451-4
	铜丝 (Steel wire) 无涂层 Black Liner	Ø4.2X1.8mm L 5.5METERS Ø1.2-1.6mm 52451-5

欧式 (枪头可360°旋转调节) 万向系列焊枪及配件

European Series (360°Angle Rotated Adjustment Torch Head) Torch and Consumables

360°旋转枪头, 自由调节焊接角度, 提升工作舒适性, 快速更换枪头, 提高工作效率, 降低维修成本

360°Angle Rotated Torch Head, Free welding Angle Adjustment, Improved Work Experience, Fast Replacement, Improved Work Efficiency, Reduce Repairing Cost.



TECHNICAL DATA (技术参数)
RATING (额定值): 150A Cu-Cr
150A MIXED GASES 混合气体
DUTY CYCLE (负载率): 40%
WIRE SIZE (适用焊丝直径): 0.6-1.0mm



EURO

焊枪枪头 COMPLETE TORCH (1Pcs/Pack)			
15A欧枪 MIG Torch 15A EURO	Copper wire 12-14-16mm ²	1.3 0METERS	002-0449-1
	Copper wire 12-14-16mm ²	1.4 0METERS	002-0450-1
	Copper wire 12-14-16mm ²	1.5 0METERS	002-0451-1

枪管/弯管 SWAN NECK/TORCH HEAD (2Pcs/Pack)			
62#黄铜 (62# Brass)	Swan Neck + TIP HOLDER		002-0009-1

导电嘴座 TIP HOLDER (20Pcs/Pack)			
59#黄铜 (59# Brass)	L42.0mm, M6, M10x1 LH		002-0078

导电嘴 CONTACT TIP (20Pcs/Pack)			
紫铜 (E-Cu)		MX25mm, Ø5.5-5.8-6.0mm=0.6mm Welding wire	140-0008
		MX25mm, Ø5.5-5.8-6.0mm=0.8mm Welding wire	140-0018
		MX25mm, Ø5.5-5.8-6.0mm=0.9mm Welding wire	140-0177
		MX25mm, Ø5.5-5.8-6.0mm=1.0mm Welding wire	140-0233
		MX25mm, Ø5.5-5.8-6.0mm=1.2mm Welding wire	140-0178
		MX25mm, Ø5.5-5.8-6.0mm=1.5mm AL Welding wire	141-0002
黄铜 (E-Cu for AL)		MX25mm, Ø5.5-5.8-6.0mm=1.0mm AL Welding wire	141-0007
		MX25mm, Ø5.5-5.8-6.0mm=1.2mm AL Welding wire	141-0017
		MX25mm, Ø6.0mm=0.6mm Welding wire	140-0855
银铜合金 (CuCrZr)		MX25mm, Ø6.0mm=0.8mm Welding wire	140-0062
		MX25mm, Ø6.0mm=1.0mm Welding wire	140-0256
		MX25mm, Ø6.0mm=1.2mm Welding wire	140-0275

喷嘴 NOZZLE (10Pcs/Pack)			
	铜包/黄铜 (Copper/Brass)	锥形圆锥Conical 15.8MM, Ø14.2MM, Ø10-1.2MM	145-0041
	铜包/黄铜 (Copper/Brass)	锥形圆锥Conical 15.8MM, Ø12.0MM, Ø10-1.2MM	145-0073
	铜包/黄铜 (Copper/Brass)	尖形圆锥Tapered 15.8MM, Ø9.5MM, Ø10-1.2MM	145-0123

送丝软管 LINER (1Pcs/Pack)			
	铜包/黄铜 (Copper/Brass)	蓝色Blue Ø40.5mm 1.35METERS Ø10-0.8mm	124-0011
	铜包/黄铜 (Copper/Brass)	蓝色Blue Ø40.5mm 1.45METERS Ø10-0.8mm	124-0012
	铜包/黄铜 (Copper/Brass)	蓝色Blue Ø40.5mm 1.55METERS Ø10-0.8mm	124-0013



TECHNICAL DATA (技术参数)
RATING (额定值): 250A Cu2

220A MIXED GASES 混合气体

EUTY CYCLE (暂载率): 60%

WIRE SIZE (适用焊丝直径): 0.8-1.2mm



EURO

焊枪组 COMPLETE TORCH (1Pcs/Pack)

焊丝 (Copper wire) 16-18-25mm ²	1.3 DMETERS	012.0103-1
焊丝 (Copper wire) 16-18-25mm ²	1.4 DMETERS	012.0104-1
焊丝 (Copper wire) 16-18-25mm ²	1.5 DMETERS	012.0105-1

枪颈/枪管 SWAN NECK (2Pcs/Pack)

	内径芯 (In: 62#BRASS)	012.0001-1
--	--------------------	------------

选择/焊枪底座 TIP HOLDER (20Pcs/Pack)

	5/8"黄铜 (5/8" Brass)	1.26.0mm, MI	142.0003
--	---------------------	--------------	----------

种电极 CONTACT TIP (20Pcs/Pack)

	黄铜 (E-Cu)	MIG20mm, DN5-7.5-8.0mm+0.8mm Welding wire	140.0051
		MIG20mm, DN5-7.5-8.0mm+0.9mm Welding wire	140.0169
		MIG20mm, DN5-7.5-8.0mm+1.0mm Welding wire	140.0242
		MIG20mm, DN5-7.5-8.0mm+1.2mm Welding wire	140.0278
	黄铜 (E-Cu for AL)	MIG20mm, DN5-7.5-8.0mm+0.8mm AL WELDING WIRE	141.0001
		MIG20mm, DN5-7.5-8.0mm+1.0mm AL WELDING WIRE	141.0006
		MIG20mm, DN5-7.5-8.0mm+1.2mm AL WELDING WIRE	141.0010
	银铜钨 (Cu-Cr)	MIG20mm, DN8.0mm+0.8mm Welding wire	140.0054
		MIG20mm, DN8.0mm+1.0mm Welding wire	140.0245
		MIG20mm, DN8.0mm+1.2mm Welding wire	140.0382

喷嘴 NOZZLE (5Pcs/Pack)

	铜制/黄铜 (Copper/Brass)	内径/内径/Conical 12.5MM, Ø12.5MM, Ø12.15MM	143.0047
	铜制/黄铜 (Copper/Brass)	内径/内径/Conical 16.0MM, Ø16.0MM, Ø16.15MM	143.0050
	铜制/黄铜 (Copper/Brass)	内径/内径/Conical 18.0MM, Ø18.0MM, Ø18.15MM	143.0128

分流器 GAS DIFFUSER (20Pcs/Pack)

	塑料 (DMC)	012.0183
	陶瓷 (Ceramics)	012.0183-1

送丝管 LINEER (1Pcs/Pack)

	焊丝 (steel wire) 红色/铝焊丝 Red liner	Ø4.2X1.0mm L.3.5METERS Ø1.0-1.2mm	124.0026-2
	焊丝 (steel wire) 红色/铝焊丝 Red liner	Ø4.2X1.0mm L.4.5METERS Ø1.0-1.2mm	124.0031-2
	焊丝 (steel wire) 红色/铝焊丝 Red liner	Ø4.2X1.0mm L.5.5METERS Ø1.0-1.2mm	124.0035-2



TECHNICAL DATA (技术参数)
RATING (额定值): 250A Cu2

20A MIXED GASES 混合气体

EUTY CYCLE (暂载率): 60%

WIRE SIZE (适用焊丝直径): 0.8-1.2mm



EURO

焊枪组 COMPLETE TORCH (1Pcs/Pack)

焊丝 (Copper wire) 16-18-25mm ²	1.3 DMETERS	004.0312-1
焊丝 (Copper wire) 16-18-25mm ²	1.4 DMETERS	004.0313-1
焊丝 (Copper wire) 16-18-25mm ²	1.5 DMETERS	004.0314-1

枪颈/枪管 SWAN NECK (2Pcs/Pack)

	62#黄铜 (62# Brass)	Swan Neck	004.0012-1
--	-------------------	-----------	------------

种电极 CONTACT TIP (20Pcs/Pack)

	黄铜 (COPPER)	1.35.0mm, MI	142.0001
	5/8"黄铜 (5/8" Brass)	1.35.0mm, MI	

种电极 CONTACT TIP (20Pcs/Pack)

	黄铜 (E-Cu)	MIG20mm, DN5-7.5-8.0mm+0.8mm Welding wire	140.0051
		MIG20mm, DN5-7.5-8.0mm+0.9mm Welding wire	140.0169
		MIG20mm, DN5-7.5-8.0mm+1.0mm Welding wire	140.0242
		MIG20mm, DN5-7.5-8.0mm+1.2mm Welding wire	140.0278
	黄铜 (E-Cu for AL)	MIG20mm, DN5-7.5-8.0mm+0.8mm AL WELDING WIRE	141.0001
		MIG20mm, DN5-7.5-8.0mm+1.0mm AL WELDING WIRE	141.0006
		MIG20mm, DN5-7.5-8.0mm+1.2mm AL WELDING WIRE	141.0010
	银铜钨 (Cu-Cr)	MIG20mm, DN8.0mm+0.8mm Welding wire	140.0054
		MIG20mm, DN8.0mm+1.0mm Welding wire	140.0245
		MIG20mm, DN8.0mm+1.2mm Welding wire	140.0382

喷嘴 NOZZLE (5Pcs/Pack)

	铜制/黄铜 (Copper/Brass)	内径/内径/Conical 12.5MM, Ø12.5MM, Ø12.15MM	143.0047
	铜制/黄铜 (Copper/Brass)	内径/内径/Conical 16.0MM, Ø16.0MM, Ø16.15MM	143.0050
	铜制/黄铜 (Copper/Brass)	内径/内径/Conical 18.0MM, Ø18.0MM, Ø18.15MM	143.0128

送丝管 LINEER (1Pcs/Pack)

	焊丝 (steel wire) 红色/铝焊丝 Red liner	Ø4.2X1.0mm L.3.5METERS Ø1.0-1.2mm	124.0026-2
	焊丝 (steel wire) 红色/铝焊丝 Red liner	Ø4.2X1.0mm L.4.5METERS Ø1.0-1.2mm	124.0031-2
	焊丝 (steel wire) 红色/铝焊丝 Red liner	Ø4.2X1.0mm L.5.5METERS Ø1.0-1.2mm	124.0035-2



TECHNICAL DATA (技术参数)
RATING (额定值): 300A Co2
270A MIXED GASES 混合气体
DUTY CYCLE (暂载率): 60%
WIRE SIZE (送丝口径范围): 0.8-1.2mm



EURO

焊枪组 COMPLETE TORCH (1Pcs/Pack)

铝丝 (Copper wire) 1.25-3.0mm	1.5.0MM TIGS	014.0143.1
铝丝 (Copper wire) 1.25-3.0mm	1.4.0MM TIGS	014.0144.1
铝丝 (Copper wire) 1.25-3.0mm	1.5.0MM TIGS	014.0145.1

枪颈/枪管 SWAN NECK (2Pcs/Pack)

枪颈/枪管	枪颈/枪管 SWAN NECK (2Pcs/Pack)	998.0091-1
-------	-----------------------------	------------

导电/导电嘴 TIP HOLDER (20Pcs/Pack)

导电嘴 (SIF Brass)	1.25.0mm, MB	142.0020
导电嘴 (SIF Brass)	1.25.0mm, MB	142.0005

导电嘴 CONTACT TIP (20Pcs/Pack)

	铝丝 (E-Cu)	MIG30mm, Ø6.5-7.5-8.0mm+0.8mm Welding wire	140.0051
		MIG20mm, Ø6.5-7.5-8.0mm+0.8mm Welding wire	140.0109
		MIG20mm, Ø6.5-7.5-8.0mm+1.0mm Welding wire	140.0142
	铜铝丝 (Cu-CuZr)	MIG20mm, Ø6.5-7.5-8.0mm+1.0mm Welding wire	140.0379
		MIG20mm, Ø6.0mm+0.8mm Welding wire	140.0054
		MIG20mm, Ø6.0mm+1.0mm Welding wire	140.0143
	铝丝 (E-Cu)	MIG30mm, Ø6.5-10.0mm+0.8mm Welding wire	140.0114
		MIG30mm, Ø6.5-10.0mm+1.0mm Welding wire	140.0113
		MIG30mm, Ø6.5-10.0mm+1.2mm Welding wire	140.0142
	铜铝丝 (Cu-CuZr)	MIG30mm, Ø10.0mm+0.8mm Welding wire	140.0117
		MIG30mm, Ø10.0mm+1.0mm Welding wire	140.0116
		MIG30mm, Ø10.0mm+1.2mm Welding wire	140.0145

喷嘴 NOZZLE (3Pcs/Pack)

	铜丝/铜管 (Copper Brass)	内径/外径 Ø4.0MM Ø10.0MM Ø2.0-2.5MM	143.0045
		内径/外径 Ø4.0MM Ø10.0MM Ø2.0-2.5MM	143.0078
		内径/外径 Ø4.0MM Ø10.0MM Ø2.0-2.5MM	143.0125

分流器 GAS DIFFUSER (20Pcs/Pack)

	铝丝 (Copper)	014.0033
	陶瓷 (Ceramic)	014.0023

送丝管 LINER (1Pcs/Pack)

	铝丝 (steel wire) 黄铜/铜管 Red liner	Ø4.8x2.0mm L 5.5METERS	Ø12.1.6mm	124.0041-1
	铝丝 (steel wire) 黄铜/铜管 Red liner	Ø4.8x2.0mm L 4.5METERS	Ø12.1.6mm	124.0041-2
	铝丝 (steel wire) 黄铜/铜管 Red liner	Ø4.8x2.0mm L 1.5METERS	Ø12.1.6mm	124.0041-3

欧式 (远调控/电位器调节) 系列焊枪及配件


European Series (Remote Control / Current&Voltage Control)
Torch and Consumables

远程控制 (一元化调节) 1-8档位电流大小自由切换。大幅提升工作效率

Remote Control (Synergic Mode Adjustment) Current Switch Range 1-8, Improved Work Efficiency



1. Adjustable 1-8 level current setting.
2. Welding current match with welding voltage automatically.
3. Unique design for synergic welder.





TECHNICAL DATA (技术参数)
RATING (额定值): 180A Cu2
150A MIXED GASES 混合气体
DUTY CYCLE (负载率): 60%
WIRE SIZE (适用焊丝直径): 0.8-1.2mm



EURO

焊枪组 COMPLETE TORCH (1Pcs/Pack)			
15AK3P MIG Torch 15AK EURO	Copper wire 12-14-15mm ²	1.3 METERS	002-0440-2
	Copper wire 12-14-15mm ²	1.4 METERS	002-0450-2
	Copper wire 12-14-15mm ²	1.5 METERS	002-0451-2

枪管/电管 SWAN NECK/TORCH HEAD (2Pcs/Pack)			
	62# 黄铜 (62# Brass)	Swan Neck + TIP HOLDER	002-0009

选杆/电嘴座 TIF HOLDER (20Pcs/Pack)			
	59# 黄铜 (59# Brass)	142.0mm, M6, M8X1.1H	002-0078

导电嘴 CONTACT TIP (20Pcs/Pack)			
	紫铜 (E-Cu)	MIG25mm, Ø1.5-5.8-6.0mm+0.8mm Welding wire	140-0008
		MIG25mm, Ø1.5-5.8-6.0mm+0.8mm Welding wire	140-0059
		MIG25mm, Ø1.5-5.8-6.0mm+0.8mm Welding wire	140-0177
		MIG25mm, Ø1.5-5.8-6.0mm+1.0mm Welding wire	140-0253
		MIG25mm, Ø1.5-5.8-6.0mm+1.2mm Welding wire	140-0178
		MIG25mm, Ø1.5-5.8-6.0mm+1.2mm AL Welding wire	141-0002
	紫铜 (E-Cu for AL)	MIG25mm, Ø1.5-5.8-6.0mm+1.0mm AL Welding wire	141-0007
		MIG25mm, Ø1.5-5.8-6.0mm+1.2mm AL Welding wire	141-0017
		MIG25mm, Ø1.5-5.8-6.0mm+1.2mm AL Welding wire	141-0017
	银铜合金 (Cu/Cr)	MIG25mm, Ø1.0mm+0.8mm Welding wire	140-0855
		MIG25mm, Ø1.0mm+0.8mm Welding wire	140-0062
		MIG25mm, Ø1.0mm+1.0mm Welding wire	140-0256

喷嘴 NOZZLE (10Pcs/Pack)			
	紫铜 (紫铜) (Copper Brass)	1100000 Conical 1.5MM, Ø1.0-1.2MM	145-0041
	紫铜 (紫铜) (Copper Brass)	1100000 Conical 1.5MM, Ø1.0-1.2MM	145-0075
	紫铜 (紫铜) (Copper Brass)	1100000 Spherical 1.5MM, Ø1.0-1.2MM	145-0123

送丝管 LINER (1Pcs/Pack)			
	紫铜 (steel wire)	送丝管 Blue Ø40 5mm 1.5METERS Ø6.0-6.8mm	124-0011
	紫铜 (steel wire)	送丝管 Blue Ø40 5mm 1.5METERS Ø6.0-6.8mm	124-0012
	紫铜 (steel wire)	送丝管 Blue Ø40 5mm 1.5METERS Ø6.0-6.8mm	124-0011



TECHNICAL DATA (技术参数)
RATING (额定值): 250A Cu2
220A MIXED GASES 混合气体
DUTY CYCLE (负载率): 60%
WIRE SIZE (适用焊丝直径): 0.8-1.2mm



EURO

焊枪组 COMPLETE TORCH (1Pcs/Pack)			
紫铜 (Copper wire) 16-18-25mm ²	1.3 METERS	012-0103-2	
紫铜 (Copper wire) 16-18-25mm ²	1.4 METERS	012-0104-2	
紫铜 (Copper wire) 16-18-25mm ²	1.5 METERS	012-0105-2	

枪管/枪管 SWAN NECK (2Pcs/Pack)			
	内铜芯 (In: 62# BRASS)		012-0001

选杆/电嘴座 TIF HOLDER (20Pcs/Pack)			
	59# 黄铜 (59# Brass)	126.0mm, M6	142-0001

导电嘴 CONTACT TIP (20Pcs/Pack)			
	紫铜 (E-Cu)	MIG25mm, Ø1.5-5.8-6.0mm+0.8mm Welding wire	140-0001
		MIG25mm, Ø1.5-5.8-6.0mm+0.8mm Welding wire	140-0109
		MIG25mm, Ø1.5-5.8-6.0mm+1.0mm Welding wire	140-0042
		MIG25mm, Ø1.5-5.8-6.0mm+1.2mm Welding wire	140-0079
	紫铜 (E-Cu for AL)	MIG25mm, Ø1.5-5.8-6.0mm+0.8mm AL Welding wire	141-0001
		MIG25mm, Ø1.5-5.8-6.0mm+1.0mm AL Welding wire	141-0006
		MIG25mm, Ø1.5-5.8-6.0mm+1.2mm AL Welding wire	141-0010
	银铜合金 (Cu/Cr)	MIG25mm, Ø1.0mm+0.8mm Welding wire	140-0064
		MIG25mm, Ø1.0mm+0.8mm Welding wire	140-0045
		MIG25mm, Ø1.0mm+1.2mm Welding wire	140-0382

喷嘴 NOZZLE (10Pcs/Pack)			
	紫铜 (紫铜) (Copper Brass)	1100000 Conical 1.5MM, Ø1.0-1.2MM	145-0042
	紫铜 (紫铜) (Copper Brass)	1100000 Conical 1.5MM, Ø1.0-1.2MM	145-0080
	紫铜 (紫铜) (Copper Brass)	1100000 Spherical 1.5MM, Ø1.0-1.2MM	145-0128

气嘴管 GAS DIFFUSER (20Pcs/Pack)			
	紫铜 (Copper)		012-0103
	黄铜 (Brass)		012-0103-1

送丝管 LINER (1Pcs/Pack)			
	紫铜 (steel wire)	送丝管 Red line Ø4.20 3mm 1.5METERS Ø1.0-1.2mm	124-0026-1
	紫铜 (steel wire)	送丝管 Red line Ø4.20 3mm 1.5METERS Ø1.0-1.2mm	124-0031-1
	紫铜 (steel wire)	送丝管 Red line Ø4.20 3mm 1.5METERS Ø1.0-1.2mm	124-0029-1



TECHNICAL DATA (技术参数)
RATING (额定值): 230A Cu-Zn
200A MIXED GASES 混合气体
DUTY CYCLE (负载率): 60%
WIRE SIZE (适用焊丝直径): 0.8-1.2mm



EURO

焊枪组 COMPLETE TORCH (1Pcs/Box)			
焊丝 (Copper wire) 1.0-1.2mm	1.3 METERS	008 0312-2	
焊丝 (Copper wire) 1.0-1.2mm	1.4 METERS	008 0313-2	
焊丝 (Copper wire) 1.0-1.2mm	1.5 METERS	008 0314-2	

软管/弯管 SWAN NECK (2Pcs/Pack)			
	52#黄铜 (52# Brass)	Swan Neck	004.0012

导电嘴座 TIP HOLDER (20Pcs/Pack)			
	紫铜 (COPPER)	1.5.0mm, M6	142.0001
	52#黄铜 (52# Brass)	1.5.0mm, M6	142.0001-2

导电嘴 CONTACT TIP (20Pcs/Pack)			
	紫铜 (E-Cu)	MIG20mm, Ø6.5-7.5-8.0mm=0.8mm Welding wire	140.0051
		MIG20mm, Ø6.5-7.5-8.0mm=0.8mm Welding wire	140.0169
		MIG20mm, Ø6.5-7.5-8.0mm=1.0mm Welding wire	140.0342
	紫铜 (E-Cu for Al)	MIG20mm, Ø6.5-7.5-8.0mm=1.0mm AL WELDING WIRE	141.0007
		MIG20mm, Ø6.5-7.5-8.0mm=1.0mm AL WELDING WIRE	141.0006
		MIG20mm, Ø6.5-7.5-8.0mm=1.2mm AL WELDING WIRE	141.0010
	黄铜 (Cu-Zn)	MIG20mm, Ø8.0mm=0.8mm Welding wire	140.0054
		MIG20mm, Ø8.0mm=1.0mm Welding wire	140.0045
		MIG20mm, Ø8.0mm=1.2mm Welding wire	140.0382

喷嘴 NOZZLE (5Pcs/Pack)			
	紫铜/黄铜 (Copper/Brass)	锥形喷嘴 Conical	15MM, Ø19.0MM, ±1.2-1.5MM
		喇叭形喷嘴 Conical	15MM, Ø15.0MM, ±1.2-1.5MM
		喇叭形喷嘴 Flared	15MM, Ø17.5MM, ±1.2-1.5MM

送丝管 LINER (1Pcs/Pack)			
	焊丝 (steel wire) 红色/黄铜/紫铜 Red line	Ø4.20x1.0mm L 1.5METERS Ø1.0-1.2mm	124.0026-2
	焊丝 (steel wire) 红色/黄铜/紫铜 Red line	Ø4.20x1.0mm L 1.5METERS Ø1.0-1.2mm	124.0031-2
	焊丝 (steel wire) 红色/黄铜/紫铜 Red line	Ø4.20x1.0mm L 1.5METERS Ø1.0-1.2mm	124.0035-2



TECHNICAL DATA (技术参数)
RATING (额定值): 300A Cu-Zn
270A MIXED GASES 混合气体
DUTY CYCLE (负载率): 60%
WIRE SIZE (适用焊丝直径): 0.8-1.2mm



EURO

焊枪组 COMPLETE TORCH (1Pcs/Box)			
焊丝 (Copper wire) 1.0-1.2mm	1.3 METERS	014 0143-2	
焊丝 (Copper wire) 1.0-1.2mm	1.4 METERS	014 0144-2	
焊丝 (Copper wire) 1.0-1.2mm	1.5 METERS	014 0145-2	

软管/弯管 SWAN NECK (2Pcs/Pack)			
	紫铜 (52# BRASS)		998.0091

导电嘴座座 TIP HOLDER (20Pcs/Pack)			
	52#黄铜 (52# Brass)	1.5.0mm, M6	142.0002
	52#黄铜 (52# Brass)	1.5.0mm, M6	142.0001

导电嘴 CONTACT TIP (20Pcs/Pack)			
	紫铜 (E-Cu)	MIG30mm, Ø6.5-7.5-8.0mm=0.8mm Welding wire	140.0051
		MIG30mm, Ø6.5-7.5-8.0mm=0.8mm Welding wire	140.0169
		MIG30mm, Ø6.5-7.5-8.0mm=1.0mm Welding wire	140.0342
	紫铜 (Cu-Zn)	MIG30mm, Ø6.5-7.5-8.0mm=1.0mm Welding wire	140.0379
		MIG30mm, Ø6.5-7.5-8.0mm=1.2mm Welding wire	140.0054
		MIG30mm, Ø6.5-7.5-8.0mm=1.0mm Welding wire	140.0345
	紫铜 (E-Cu)	MIG30mm, Ø8.0mm=0.8mm Welding wire	140.0382
		MIG30mm, Ø8.0mm=1.0mm Welding wire	140.0114
		MIG30mm, Ø8.0mm=1.2mm Welding wire	140.0313
	黄铜 (Cu-Zn)	MIG30mm, Ø8.0mm=0.8mm Welding wire	140.0045
		MIG30mm, Ø8.0mm=1.0mm Welding wire	140.0117
		MIG30mm, Ø8.0mm=1.2mm Welding wire	140.0316
		MIG30mm, Ø8.0mm=1.2mm Welding wire	140.0445

喷嘴 NOZZLE (5Pcs/Pack)			
	紫铜/黄铜 (Copper/Brass)	锥形喷嘴 Conical	18.0MM, Ø19.0MM, ±2.0-2.5MM
		喇叭形喷嘴 Conical	18.0MM, Ø15.0MM, ±2.0-2.5MM
		喇叭形喷嘴 Flared	18.0MM, Ø17.5MM, ±2.0-2.5MM

分流器 GAS DIFFUSER (20Pcs/Pack)			
	塑料 (PLASTIC)		014.0041
	陶瓷 (Ceramics)		014.0023

送丝管 LINER (1Pcs/Pack)			
	焊丝 (steel wire) 红色/黄铜/紫铜 Red line	Ø4.50x1.0mm L 1.5METERS Ø1.2-1.5mm	124.0041-1
	焊丝 (steel wire) 红色/黄铜/紫铜 Red line	Ø4.50x1.0mm L 1.5METERS Ø1.2-1.5mm	124.0041-2
	焊丝 (steel wire) 红色/黄铜/紫铜 Red line	Ø4.50x1.0mm L 1.5METERS Ø1.2-1.5mm	124.0041-3



TECHNICAL DATA (技术参数)
RATING (额定值): 200A Cu2
160A MIXED GASES 混合气体
DUTY CYCLE (负载率): 60%
WIRE SIZE (适用焊丝直径): 0.8-1.2mm



PANA

EURO

焊枪组 COMPLETE TORCH (1Pcs/Box)

Copper wire 1.2-14-16mm ²	1.3METERS
Copper wire 1.2-14-16mm ²	1.4METERS
Copper wire 1.2-14-16mm ²	1.5METERS

前置/前置 SWAN NECK (5Pcs/Pack)



前置风护套, 连杆 (标配前置风护套款式) 可选配。

导电插座 TIP HOLDER (20Pcs/Pack)



外螺纹, 黄铜 (OUT, COPPER)	M6, L45.0MM, M10X1
外螺纹, 黄铜 (OUT, BRASS)	M6, L45.0MM, M10X1

导电插座 CONTACT TIP (20Pcs/Pack)




黄铜 (E-Cu) M6x40 M6x42 M6x45	Ø7.5-8.0-9.0mm-0.8mm Welding wire
	Ø7.5-8.0-9.0mm-1.0mm Welding wire
	Ø7.5-8.0-9.0mm-1.2mm Welding wire
	Ø7.5-8.0-9.0mm-1.4mm Welding wire
	Ø7.5-8.0-9.0mm-1.6mm Welding wire
铜镍合金 (Cu-CrZr) M6x40 M6x42 M6x45	Ø7.5-8.0-9.0mm-0.8mm Welding wire
	Ø7.5-8.0-9.0mm-1.0mm Welding wire
	Ø7.5-8.0-9.0mm-1.2mm Welding wire
	Ø7.5-8.0-9.0mm-1.4mm Welding wire
	Ø7.5-8.0-9.0mm-1.6mm Welding wire

喷嘴 NOZZLE (5Pcs/Pack)



铜/黄铜 (Copper/Brass)	特别圆锥 Cylindrical L75.0MM, Ø16.0MM, Ø1.0-1.2-1.5MM 特别圆锥 Conical L75.0MM, Ø11.0MM, Ø1.0-1.2-1.5MM
---------------------	--

送丝管 LINER (1Pcs/Pack)



铜丝 (Copper wire)	蓝色绝缘 Blue Ø4X1.5mm 1.3METERS Ø0.8-1.0mm
铜丝 (Copper wire)	蓝色绝缘 Blue Ø4X1.5mm 1.4METERS Ø0.8-1.0mm
铜丝 (Copper wire)	蓝色绝缘 Blue Ø4X1.5mm 1.5METERS Ø0.8-1.0mm



TECHNICAL DATA (技术参数)
RATING (额定值): 350A Cu2
300A MIXED GASES 混合气体
DUTY CYCLE (负载率): 60%
WIRE SIZE (适用焊丝直径): 0.9-1.2mm



PANA

EURO

焊枪组 COMPLETE TORCH (1Pcs/Box)

Copper wire 2.5-30-35mm ²	1.3METERS
Copper wire 2.5-30-35mm ²	1.4METERS
Copper wire 2.5-30-35mm ²	1.5METERS

前置/前置 SWAN NECK (5Pcs/Pack)



前置风护套, 连杆 (标配前置风护套款式) 可选配。

导电插座 TIP HOLDER (20Pcs/Pack)



外螺纹, 黄铜 (OUT, COPPER)	M6, L66.5mm, M10X1
外螺纹, 黄铜 (OUT, BRASS)	M6, L66.5mm, M10X1

导电插座 CONTACT TIP (20Pcs/Pack)



黄铜 (E-Cu) M6x40 M6x42 M6x45	Ø7.5-8.0-9.0mm-0.8mm Welding wire
	Ø7.5-8.0-9.0mm-1.0mm Welding wire
	Ø7.5-8.0-9.0mm-1.2mm Welding wire
	Ø7.5-8.0-9.0mm-1.4mm Welding wire
	Ø7.5-8.0-9.0mm-1.6mm Welding wire
铜镍合金 (Cu-CrZr) M6x40 M6x42 M6x45	Ø7.5-8.0-9.0mm-0.8mm Welding wire
	Ø7.5-8.0-9.0mm-1.0mm Welding wire
	Ø7.5-8.0-9.0mm-1.2mm Welding wire
	Ø7.5-8.0-9.0mm-1.4mm Welding wire
	Ø7.5-8.0-9.0mm-1.6mm Welding wire

喷嘴 NOZZLE (5Pcs/Pack)



铜/黄铜 (Copper/Brass)	特别圆锥 Cylindrical L75.0MM, Ø15.0MM, Ø1.5-2.0-2.5MM 特别圆锥 Conical L75.0MM, Ø11.0MM, Ø1.5-2.0-2.5MM
---------------------	--

分流器 GAS DIFFUSER (20Pcs/Pack)



陶瓷 Ceramic	L21.0mm, Ø10.0mm
------------	------------------

绝缘垫 INSULATOR (10Pcs/Pack)



陶瓷, 及绝缘垫	L39.0mm
----------	---------

送丝管 LINER (1Pcs/Pack)



铜丝 (Copper wire)	红色绝缘 Red Ø4.5X1.5mm 1.3METERS Ø1.0-1.2mm
铜丝 (Copper wire)	红色绝缘 Red Ø4.5X1.5mm 1.4METERS Ø1.0-1.2mm
铜丝 (Copper wire)	红色绝缘 Red Ø4.5X1.5mm 1.5METERS Ø1.0-1.2mm



TECHNICAL DATA (技术数据)
RATING (额定值): 500A Cu-Z
GASES (混合气体): 500A MIXED GASES 混合气体
DUTY CYCLE (额定周期): 60%
WIRE SIZE (适用焊丝直径): 1.2-1.6mm



PANA

EURO

焊枪组 COMPLETE TORCH (1Pcs/Box)	
Copper wire 35-40.50mm ²	1.3.0METERS
Copper wire 35-40.50mm ²	1.4.0METERS
Copper wire 35-40.50mm ²	1.5.0METERS

枪管/嘴管 SWAN NECK (5Pcs/Pack)

聚四氟乙烯, 连杆 (标配管嘴外嘴款式) 可选配。

导电嘴座 TIP HOLDER (20Pcs/Pack)

内嘴, 铜制 (OUT: COPPER)	M6, L34.0mm, M10X1
内嘴, 黄铜 (OUT: BRASS)	M6, L34.0mm, M10X1

导电嘴 CONTACT TIP (20Pcs/Pack)

铜制 (E-Cu) M6x40 M6x42 M6x45	Ø7.5-8.0-9.0mm-0.8mm Welding wire
	Ø7.5-8.0-9.0mm-1.0mm Welding wire
	Ø7.5-8.0-9.0mm-1.2mm Welding wire
	Ø7.5-8.0-9.0mm-1.4mm Welding wire
	Ø7.5-8.0-9.0mm-1.6mm Welding wire
	Ø7.5-8.0-9.0mm-1.8mm Welding wire
铜铬合金 (CuCrZr) M6x40 M6x42 M6x45	Ø7.5-8.0-9.0mm-1.0mm Welding wire
	Ø7.5-8.0-9.0mm-1.2mm Welding wire
	Ø7.5-8.0-9.0mm-1.4mm Welding wire
	Ø7.5-8.0-9.0mm-1.6mm Welding wire
	Ø7.5-8.0-9.0mm-1.8mm Welding wire
	Ø7.5-8.0-9.0mm-2.0mm Welding wire

喷嘴 NOZZLE (1Pcs/Pack)

铜制/黄铜 (Copper/Brass)	标准型 Cylindrical 1.04.0MM, Ø10.0MM, Ø2.2-2.5-3.0MM 锥形型 Conical 1.04.0MM, Ø10.0MM, Ø2.2-2.5-3.0MM
----------------------	--

空气扩散器 GAS DIFFUSER (20Pcs/Pack)

陶瓷 Ceramic	L26.0mm, Ø9.5mm
------------	-----------------

绝缘隔热 INSULATOR (10Pcs/Pack)

PP, 及玻璃纤维	L38.0mm
-----------	---------

送丝管 LINER (1Pcs/Pack)

铜丝 (steel wire)	黑色内嘴座 Black Ø4.8X2.4mm L 3.5METERS Ø1.2-1.6mm
铜丝 (steel wire)	黑色内嘴座 Black Ø4.8X2.4mm L 4.5METERS Ø1.2-1.6mm
铜丝 (steel wire)	黑色内嘴座 Black Ø4.8X2.4mm L 5.5METERS Ø1.2-1.6mm

OTC® 200A 气冷式焊枪 OTC Type 200A welding torch

额定值: 200A CO₂/180A混合气体, 60%额定率, 焊丝直径: 0.8-1.2mm,
Rating: 200A CO₂/180A mixed gas, 60% duty cycle, Wires: 0.8-1.2mm.



枪管/嘴管 SWAN NECK (5Pcs/Pack)

聚四氟乙烯, 连杆 (标配管嘴外嘴款式) 可选配。

导电嘴座 TIP HOLDER (20Pcs/Pack)

外嘴, 铜制 (OUT: COPPER)	M6, L45.0MM, M10X1
外嘴, 黄铜 (OUT: BRASS)	M6, L45.0MM, M10X1

喷嘴 NOZZLE (1Pcs/Pack)

铜制/黄铜 (Copper/Brass)	标准型 Cylindrical 1.04MM, Ø10.0MM, Ø10.12-1.9MM 锥形型 Conical 1.04MM, Ø10.0MM, Ø10.12-1.9MM
----------------------	--

送丝管 LINER (1Pcs/Pack)

铜丝 (steel wire)	黑色内嘴座 Black Ø4.8X1.5mm L 1.9METERS Ø0.8-1.2mm 黑色内嘴座 Black Ø4.8X1.5mm L 4.9METERS Ø0.8-1.2mm 黑色内嘴座 Black Ø4.8X1.5mm L 9.9METERS Ø0.8-1.2mm
-----------------	---

焊枪组 COMPLETE TORCH (1Pcs/Box)

Copper wire 16-18mm ²	1.3.0METERS
Copper wire 16-18mm ²	1.4.0METERS
Copper wire 16-18mm ²	1.5.0METERS

导电嘴 CONTACT TIP (20Pcs/Pack)

铜制 (E-Cu) L40mm-42mm-45mm	Ø7.5-8.0-9.0mm-0.8mm Welding wire
	Ø7.5-8.0-9.0mm-1.0mm Welding wire
	Ø7.5-8.0-9.0mm-1.2mm Welding wire
	Ø7.5-8.0-9.0mm-1.4mm Welding wire
	Ø7.5-8.0-9.0mm-1.6mm Welding wire
	Ø7.5-8.0-9.0mm-1.8mm Welding wire
铜铬合金 (CuCrZr) L40mm-42mm-45mm	Ø7.5-8.0-9.0mm-1.0mm Welding wire
	Ø7.5-8.0-9.0mm-1.2mm Welding wire
	Ø7.5-8.0-9.0mm-1.4mm Welding wire
	Ø7.5-8.0-9.0mm-1.6mm Welding wire
	Ø7.5-8.0-9.0mm-1.8mm Welding wire
	Ø7.5-8.0-9.0mm-2.0mm Welding wire



OTC® 350A 气冷式焊枪
OTC Type 350A welding torch

额定值: 350A CO₂/Ar混合气体, 80%负载率, 焊丝直径: 1.0-1.4mm,
Rating: 350A Cu, 300Armed gas, 80% duty cycle.Wires: 1.0-1.4mm.

电嘴/接管 SWAN NECK (5Pcs/Pack)	
第四版护套, 连杆 (与配套管外螺纹式) 可适配。	
导电嘴座 TIP HOLDER (20Pcs/Pack)	
内螺纹: 铜制 (IN COPPER)	M6, L78.0mm, M14X1
内螺纹: 黄铜 (IN BRASS)	M6, L78.0mm, M14X1
喷嘴 NOZZLE (5Pcs/Pack)	
铜制/黄铜 (Copper/Brass)	材料规格: Cylindrical 1.5MM, Ø10.0MM, Ø2.25-2.5MM 锥形规格: Conical 1.5MM, Ø10.0MM, Ø2.25-2.5MM
分流器 GAS DIFFUSER (20Pcs/Pack)	
陶瓷 Ceramic	L25.0mm, Ø9.5mm
绝缘套 INSULATOR (10Pcs/Pack)	
绝缘套 Insulator	L38.0mm
送丝管 LINE (1Pcs/Pack)	
铜丝 (Copper wire)	材料规格: Rod Ø4.0X1.0mm L1.5METERS Ø10-12mm 材料规格: Rod Ø4.0X1.0mm L1.5METERS Ø10-12mm 材料规格: Rod Ø4.0X1.0mm L1.5METERS Ø10-12mm

导电嘴 CONTACT TIP (20Pcs/Pack)	
铜制 (E-Cu)	Ø7.5-Ø8.0mm→0.8mm Welding wire L40mm, 42mm, 45mm
	Ø7.5-Ø8.0mm→1.2mm Welding wire Ø7.5-Ø8.0mm→1.4mm Welding wire Ø7.5-Ø8.0mm→1.6mm Welding wire
银钨制 (CuCrZr)	Ø7.5-Ø8.0mm→0.8mm Welding wire L40mm, 42mm, 45mm
	Ø7.5-Ø8.0mm→1.2mm Welding wire Ø7.5-Ø8.0mm→1.4mm Welding wire Ø7.5-Ø8.0mm→1.6mm Welding wire
焊枪组 COMPLETE TORCH (1Pcs/Box)	
Copper wire 16-18mm	L3.0METERS L4.0METERS L5.0METERS



OTC® 500A 气冷式焊枪
OTC Type 500A welding torch

额定值: 500A CO₂/Ar混合气体, 80%负载率, 焊丝直径: 1.2-1.4mm,
Rating: 500A Cu, 340Armed gas, 80% duty cycle.Wires: 1.2-1.4mm.

电嘴/接管 SWAN NECK (5Pcs/Pack)	
第四版护套, 连杆 (与配套管外螺纹式) 可适配。	
导电嘴座 TIP HOLDER (20Pcs/Pack)	
内螺纹: 铜制 (IN COPPER)	M6, L88.0mm, M14X1
内螺纹: 黄铜 (IN BRASS)	M6, L88.0mm, M14X1
喷嘴 NOZZLE (5Pcs/Pack)	
铜制/黄铜 (Copper/Brass)	材料规格: Cylindrical 1.5MM, Ø10.0MM, Ø2.25-2.5MM 锥形规格: Conical 1.5MM, Ø10.0MM, Ø2.25-2.5MM
分流器 GAS DIFFUSER (20Pcs/Pack)	
陶瓷 Ceramic	L25.0mm, Ø9.5mm
绝缘套 INSULATOR (10Pcs/Pack)	
绝缘套 Insulator	L38.0mm
送丝管 LINE (1Pcs/Pack)	
铜丝 (Copper wire)	材料规格: Rod Ø4.0X1.0mm L1.5METERS Ø12-14mm 材料规格: Rod Ø4.0X1.0mm L1.5METERS Ø12-14mm 材料规格: Rod Ø4.0X1.0mm L1.5METERS Ø12-14mm

导电嘴 CONTACT TIP (20Pcs/Pack)	
铜制 (E-Cu)	Ø7.5-Ø8.0mm→0.8mm Welding wire L40mm, 42mm, 45mm
	Ø7.5-Ø8.0mm→1.2mm Welding wire Ø7.5-Ø8.0mm→1.4mm Welding wire Ø7.5-Ø8.0mm→1.6mm Welding wire
银钨制 (CuCrZr)	Ø7.5-Ø8.0mm→0.8mm Welding wire L40mm, 42mm, 45mm
	Ø7.5-Ø8.0mm→1.2mm Welding wire Ø7.5-Ø8.0mm→1.4mm Welding wire Ø7.5-Ø8.0mm→1.6mm Welding wire
焊枪组 COMPLETE TORCH (1Pcs/Box)	
Copper wire 16-18mm	L3.0METERS L4.0METERS L5.0METERS



ESAB® PSF250A 气冷式焊枪
ESAB PSF Type 500A welding torch

额定值: 250A CO₂/Ar混合气体, 60%暂载率, 焊丝直径: 0.8-1.2mm,
Rating: 250A Co, 220Amixed gas, 60% duty cycle Wires: 0.8-1.2mm.

枪颈/枪管 SWAN NECK (2Pcs/Pack)

导电嘴座 TIP HOLDER (20Pcs/Pack)

喷嘴 NOZZLE (5Pcs/Pack)

铜/黄铜 (Copper/Brass)	长度/长度 L19.0mm
	内径/内径 Ø15.2mm

气流扩散器 GAS DIFFUSER (10Pcs/Pack)

送丝管 LINER (1Pcs/Pack)

铜丝 (Steel wire)	长度/长度 L1.5Meters
	内径/内径 Ø1.5mm

导电嘴 CONTACT TIP (20Pcs/Pack)

铜 (E-Cu) L27.0mm	Ø7.5-8.0mm-0.6mm Welding wire
	Ø7.5-8.0mm-0.8mm Welding wire
	Ø7.5-8.0mm-0.9mm Welding wire
	Ø7.5-8.0mm-1.0mm Welding wire
	Ø7.5-8.0mm-1.2mm Welding wire

完整焊枪 COMPLETE TORCH (1Pcs/Box)

铜丝 (Steel wire)	长度/长度 L1.5Meters
	内径/内径 Ø1.5mm



ESAB® PSF305 气冷式焊枪
PSF 305 welding torch

额定值: 350A CO₂/Ar混合气体, 60%暂载率, 焊丝直径: 0.8-1.6mm,
Rating: 350A Co, 325Amixed gas, 60% duty cycle Wires: 0.8-1.6mm.

枪颈/枪管 SWAN NECK (2Pcs/Pack)

导电嘴座 TIP HOLDER (20Pcs/Pack)

喷嘴 NOZZLE (5Pcs/Pack)

铜/黄铜 (Copper/Brass)	长度/长度 L20.2mm
	内径/内径 Ø20.2mm

气流扩散器 GAS DIFFUSER (10Pcs/Pack)

送丝管 LINER (1Pcs/Pack)

铜丝 (Steel wire)	长度/长度 L1.5Meters
	内径/内径 Ø1.5mm

导电嘴 CONTACT TIP (20Pcs/Pack)

铜 (E-Cu) MS- L17.0mm	Ø8.5mm-0.6mm Welding wire
	Ø8.5mm-1.0mm Welding wire
	Ø8.5mm-1.2mm Welding wire
	Ø8.5mm-1.4mm Welding wire
	Ø8.5mm-1.6mm Welding wire

完整焊枪 COMPLETE TORCH (1Pcs/Box)

铜丝 (Steel wire)	长度/长度 L1.5Meters
	内径/内径 Ø1.5mm

ESAB® PSF405气冷式焊枪
PSF 405 welding torch

额定值: 80% CO₂/18% Ar混合气体, 60% 暂载率, 焊丝直径: 0.8-1.6mm,
Rating: 80% Co, 18% Ar mixed gas, 60% duty cycle Wires: 0.8-1.6mm.



枪颈/枪颈 SWAN NECK (2Pcs/Pack)

导电嘴座 TIP HOLDER (20Pcs/Pack)

喷嘴 NOZZLE (5Pcs/Pack)

铜制/黄铜 (Copper/Brass)	Ø 10-17.0MM: Ø 2.0-2.5MM
	Ø 18-21.0MM: Ø 2.0-2.5MM

供气器 GAS DIFFUSER (10Pcs/Pack)

送丝管 LINER (1Pcs/Pack)

铜制 (Steel wire)	送丝管 Back Ø432.4mm L3.9METERS Ø12.1-1.6mm
	送丝管 Back Ø432.4mm L4.9METERS Ø12.1-1.6mm
	送丝管 Back Ø432.4mm L5.9METERS Ø12.1-1.6mm

导电嘴 CONTACT TIP (20Pcs/Pack)

铜制 (E-Cu) MS- L37.0mm	Ø6.5mm-Ø8.0mm Welding wire
	Ø8.5mm-1.0mm Welding wire
	Ø8.5mm-1.2mm Welding wire
	Ø8.5mm-1.4mm Welding wire
	Ø8.5mm-1.6mm Welding wire

焊枪组 COMPLETE TORCH (1Pcs/Pack)

Copper wire 35-45mm²	1.3METERS
	1.4METERS
	1.5METERS

ESAB® PSF505气冷式焊枪
PSF 505 welding torch

额定值: 50% CO₂/40% Ar混合气体, 60% 暂载率, 焊丝直径: 1.0-1.6mm,
Rating: 50% Co, 40% Ar mixed gas, 60% duty cycle Wires: 1.0-1.6mm.



枪颈/枪颈 SWAN NECK (2Pcs/Pack)

导电嘴座 TIP HOLDER-M8 (COPPER) (20Pcs/Pack)

喷嘴 NOZZLE (5Pcs/Pack)

铜制/黄铜 (Copper/Brass)	Ø 10-17.0MM: Ø 2.0-2.5MM
	Ø 18-21.0MM: Ø 2.0-2.5MM

供气器 GAS DIFFUSER (10Pcs/Pack)

送丝管 LINER (1Pcs/Pack)

铜制 (Steel wire)	送丝管 Back Ø432.4mm L3.9METERS Ø12.1-1.6mm
	送丝管 Back Ø432.4mm L4.9METERS Ø12.1-1.6mm
	送丝管 Back Ø432.4mm L5.9METERS Ø12.1-1.6mm

导电嘴 CONTACT TIP (20Pcs/Pack)

铜制 (E-Cu) MS- L37.0mm	Ø6.5mm-Ø8.0mm Welding wire
	Ø8.5mm-1.0mm Welding wire
	Ø8.5mm-1.2mm Welding wire
	Ø8.5mm-1.4mm Welding wire
	Ø8.5mm-1.6mm Welding wire

焊枪组 COMPLETE TORCH (1Pcs/Pack)


Copper wire 35-45mm²	1.3METERS
	1.4METERS
	1.5METERS



Part	Part No.	Description
1	8841307	Switch lock
2	884130807	Insulator/thermoinsulation
3	88413108	End flange
4	8841308	Cable lock
5	884131000	Trigger terminal
6	8841308100A	Handle
7	88413101000	Clamp
8	8841308000	Spring
9	8841308	Cable assembly
10	8841310000	Trigger connection cable
11	88413080A	Trigger switch
12	88413080	Trigger switch
13	8841308	Handle
14	8841308	Handle
15	8841307	Flange
16	884130800-05-1-A	Cable connector


Part	Part No.	Description
1	884130800-05	Spring
17	884130800-1	Handle
18	8841308	Flange
19	884130800-2	Handle (L/R)
20	884130800-2-A	Handle (L/R)
21	8841308	Handle
22	884130800	Handle
23	884130800	Handle
24	884130800	Handle
25	884130800	Handle
26	884130800	Handle
27	884130800	Handle
28	884130800	Handle
29	884130800	Handle
30	884130800	Handle
31	884130800	Handle
32	884130800	Handle
33	884130800	Handle
34	884130800	Handle
35	884130800	Handle
36	884130800	Handle
37	884130800	Handle
38	884130800	Handle
39	884130800	Handle
40	884130800	Handle
41	884130800	Handle
42	884130800	Handle
43	884130800	Handle
44	884130800	Handle
45	884130800	Handle
46	884130800	Handle
47	884130800	Handle
48	884130800	Handle
49	884130800	Handle
50	884130800	Handle
51	884130800	Handle
52	884130800	Handle
53	884130800	Handle
54	884130800	Handle
55	884130800	Handle
56	884130800	Handle
57	884130800	Handle
58	884130800	Handle
59	884130800	Handle
60	884130800	Handle
61	884130800	Handle
62	884130800	Handle
63	884130800	Handle
64	884130800	Handle
65	884130800	Handle
66	884130800	Handle
67	884130800	Handle
68	884130800	Handle
69	884130800	Handle
70	884130800	Handle
71	884130800	Handle
72	884130800	Handle
73	884130800	Handle
74	884130800	Handle
75	884130800	Handle
76	884130800	Handle
77	884130800	Handle
78	884130800	Handle
79	884130800	Handle
80	884130800	Handle
81	884130800	Handle
82	884130800	Handle
83	884130800	Handle
84	884130800	Handle
85	884130800	Handle
86	884130800	Handle
87	884130800	Handle
88	884130800	Handle
89	884130800	Handle
90	884130800	Handle
91	884130800	Handle
92	884130800	Handle
93	884130800	Handle
94	884130800	Handle
95	884130800	Handle
96	884130800	Handle
97	884130800	Handle
98	884130800	Handle
99	884130800	Handle
100	884130800	Handle

Part	Part No.	Description	Drawing
75	8841308	Insulator	
80	8841308 8841308-1-A 8841308	Gas flow Gas flow Gas flow	
10	8841307 8841308 8841308 8841308 8841308 8841308 8841308	Contact, 32P Contact, 32P Contact, 32P Contact, 32P Contact, 32P Contact, 32P Contact, 32P	
81	8841308 8841308 8841308 8841308 8841308 8841308 8841308	Contact, 32P Contact, 32P Contact, 32P Contact, 32P Contact, 32P Contact, 32P Contact, 32P	
12	8841307 8841308 8841308 8841308 8841308 8841308 8841308	Contact, 32P Contact, 32P Contact, 32P Contact, 32P Contact, 32P Contact, 32P Contact, 32P	
103	8841308	Wire inside 32P	
104	8841308	Wire inside 32P	
105	8841308	Wire inside 32P	
107	8841308	Copper inside 32P	
108	8841308	Copper inside 32P	

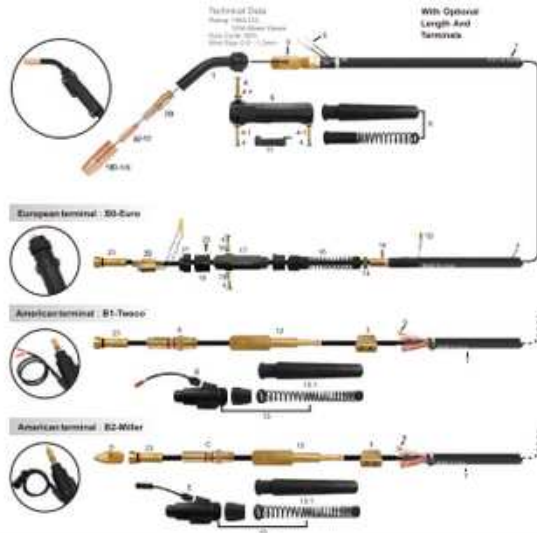[illegible]

Part No.	Part Name	Description	Part No.	Part Name	Description
1	9000-45	Connector label kit	15.1	9000-27-001	Router box
2	9000-45	Connector label kit	16	9000-0000-00-0-4	Router connector
3	9000-01	Cable connector	17	9000-0000-00-0	N/A
4	9000-02	Spine	18	9000-0000-00-0	Spine
4.01	9000-0000-0	Net	19	9000-0000-00-0	Routing
5	9000-0000-0	Terminal	17	9000-0000-00-0	N/A
6	9000-01	Handle with binder system	18	9000-0000-00-0	Routing (SA)
7	900-00	Cable assembly	19	9000-0000-00-0	Routing (SA)
8	9000-0000-00-0-1	Router box	20	9000-0000-00-0	Spine
9	9000-0000-00-0-1	Spine	21	9000-0000-00-0	Spine
10	9000-0000-00-0-1	Router box	22	9000-0000-00-0	Spine
11	9000-0000-00-0-1	Router box	23	9000-0000-00-0	Spine
12	9000-0000-00-0-1	Router box	24	9000-0000-00-0	Spine
13	9000-0000-00-0-1	Router box	25	9000-0000-00-0	Spine
14	9000-0000-00-0-1	Router box	26	9000-0000-00-0	Spine
15	9000-0000-00-0-1	Router box	27	9000-0000-00-0	Spine
16	9000-0000-00-0-1	Router box	28	9000-0000-00-0	Spine
17	9000-0000-00-0-1	Router box	29	9000-0000-00-0	Spine
18	9000-0000-00-0-1	Router box	30	9000-0000-00-0	Spine
19	9000-0000-00-0-1	Router box	31	9000-0000-00-0	Spine
20	9000-0000-00-0-1	Router box	32	9000-0000-00-0	Spine
21	9000-0000-00-0-1	Router box	33	9000-0000-00-0	Spine
22	9000-0000-00-0-1	Router box	34	9000-0000-00-0	Spine
23	9000-0000-00-0-1	Router box	35	9000-0000-00-0	Spine
24	9000-0000-00-0-1	Router box	36	9000-0000-00-0	Spine
25	9000-0000-00-0-1	Router box	37	9000-0000-00-0	Spine
26	9000-0000-00-0-1	Router box	38	9000-0000-00-0	Spine
27	9000-0000-00-0-1	Router box	39	9000-0000-00-0	Spine
28	9000-0000-00-0-1	Router box	40	9000-0000-00-0	Spine
29	9000-0000-00-0-1	Router box	41	9000-0000-00-0	Spine
30	9000-0000-00-0-1	Router box	42	9000-0000-00-0	Spine
31	9000-0000-00-0-1	Router box	43	9000-0000-00-0	Spine
32	9000-0000-00-0-1	Router box	44	9000-0000-00-0	Spine
33	9000-0000-00-0-1	Router box	45	9000-0000-00-0	Spine
34	9000-0000-00-0-1	Router box	46	9000-0000-00-0	Spine
35	9000-0000-00-0-1	Router box	47	9000-0000-00-0	Spine
36	9000-0000-00-0-1	Router box	48	9000-0000-00-0	Spine
37	9000-0000-00-0-1	Router box	49	9000-0000-00-0	Spine
38	9000-0000-00-0-1	Router box	50	9000-0000-00-0	Spine
39	9000-0000-00-0-1	Router box	51	9000-0000-00-0	Spine
40	9000-0000-00-0-1	Router box	52	9000-0000-00-0	Spine
41	9000-0000-00-0-1	Router box	53	9000-0000-00-0	Spine
42	9000-0000-00-0-1	Router box	54	9000-0000-00-0	Spine
43	9000-0000-00-0-1	Router box	55	9000-0000-00-0	Spine
44	9000-0000-00-0-1	Router box	56	9000-0000-00-0	Spine
45	9000-0000-00-0-1	Router box	57	9000-0000-00-0	Spine
46	9000-0000-00-0-1	Router box	58	9000-0000-00-0	Spine
47	9000-0000-00-0-1	Router box	59	9000-0000-00-0	Spine
48	9000-0000-00-0-1	Router box	60	9000-0000-00-0	Spine
49	9000-0000-00-0-1	Router box	61	9000-0000-00-0	Spine
50	9000-0000-00-0-1	Router box	62	9000-0000-00-0	Spine
51	9000-0000-00-0-1	Router box	63	9000-0000-00-0	Spine
52	9000-0000-00-0-1	Router box	64	9000-0000-00-0	Spine
53	9000-0000-00-0-1	Router box	65	9000-0000-00-0	Spine
54	9000-0000-00-0-1	Router box	66	9000-0000-00-0	Spine
55	9000-0000-00-0-1	Router box</			

Code	Part No.	Description	Welding parts
78	TW01 TW01-23	Gas offset Gas offset	
89	TW01-33 TW01-36 TW01-39 TW01-42 TW01-45	Connect to 33° Connect to 36° Connect to 39° Connect to 42° Connect to 45°	
89	TW01H33 TW01H36 TW01H42 TW01H45 TW01H48	Connect to 33°H.D Connect to 36°H.D Connect to 42°H.D Connect to 45°H.D Connect to Alum H.D 33°	
92	TW01T33 TW01T36 TW01T39 TW01T42 TW01T45	Connect to tapered 33° Connect to tapered 36° Connect to tapered 39° Connect to tapered 42° Connect to tapered 45°	
103	TW01-3P	Nozzle 3P°	
101	TW01-4P	Nozzle 4P°	
110	TW01-42	Nozzle 4P°	
103	TW01T-3P	Tapered nozzle 3 P°	
104	TW01-3P7	Nozzle 3P°	
110	TW01-4P7	Nozzle 4P°	
118	TW01-42P	Nozzle 4P°	

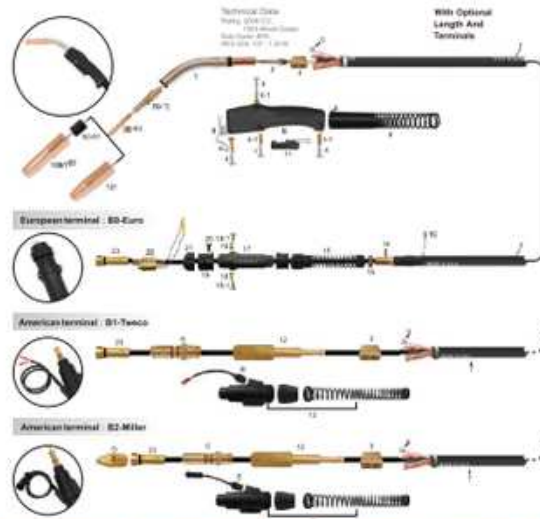

Part	Part No.	Description
1	AW0040	Conductor tube 40"
	AW0040	Conductor tube 40"
	AW0045	Conductor tube 45"
	AW0045	Conductor tube 45"
2	AW0050	Nozzle
3	AW0050	Cable connector/bush assembly
4	AW0040-15	Screw
4-1	AW0040-15	Nut
4-2	AW0040-15	Nut
5	AW0050	Terminal
6	AW0050	Pin with solder screws
7	AW00-200	Cable assembly
8	AW00-40	Spring
9	AW00-40	Spring
10	AW00-40	Spring
11	AW00-40	Spring
12	AW00-40	Spring
13	AW00-40	Spring
14	AW00-40	Spring
15	AW00-40	Spring
16	AW00-40	Spring
17	AW00-40	Spring
18	AW00-40	Spring
19	AW00-40	Spring
20	AW00-40	Spring
21	AW00-40	Spring
22	AW00-40	Spring
23	AW00-40	Spring
24	AW00-40	Spring
25	AW00-40	Spring
26	AW00-40	Spring
27	AW00-40	Spring
28	AW00-40	Spring
29	AW00-40	Spring
30	AW00-40	Spring
31	AW00-40	Spring
32	AW00-40	Spring
33	AW00-40	Spring
34	AW00-40	Spring
35	AW00-40	Spring
36	AW00-40	Spring
37	AW00-40	Spring
38	AW00-40	Spring
39	AW00-40	Spring
40	AW00-40	Spring
41	AW00-40	Spring
42	AW00-40	Spring
43	AW00-40	Spring
44	AW00-40	Spring
45	AW00-40	Spring
46	AW00-40	Spring
47	AW00-40	Spring
48	AW00-40	Spring
49	AW00-40	Spring
50	AW00-40	Spring
51	AW00-40	Spring
52	AW00-40	Spring
53	AW00-40	Spring
54	AW00-40	Spring
55	AW00-40	Spring
56	AW00-40	Spring
57	AW00-40	Spring
58	AW00-40	Spring
59	AW00-40	Spring
60	AW00-40	Spring
61	AW00-40	Spring
62	AW00-40	Spring
63	AW00-40	Spring
64	AW00-40	Spring
65	AW00-40	Spring
66	AW00-40	Spring
67	AW00-40	Spring
68	AW00-40	Spring
69	AW00-40	Spring
70	AW00-40	Spring
71	AW00-40	Spring
72	AW00-40	Spring
73	AW00-40	Spring
74	AW00-40	Spring
75	AW00-40	Spring
76	AW00-40	Spring
77	AW00-40	Spring
78	AW00-40	Spring
79	AW00-40	Spring
80	AW00-40	Spring
81	AW00-40	Spring
82	AW00-40	Spring
83	AW00-40	Spring
84	AW00-40	Spring
85	AW00-40	Spring
86	AW00-40	Spring
87	AW00-40	Spring
88	AW00-40	Spring
89	AW00-40	Spring
90	AW00-40	Spring
91	AW00-40	Spring
92	AW00-40	Spring
93	AW00-40	Spring
94	AW00-40	Spring
95	AW00-40	Spring
96	AW00-40	Spring
97	AW00-40	Spring
98	AW00-40	Spring
99	AW00-40	Spring
100	AW00-40	Spring

Part	Part No.	Description
14	AW00-40-15-4-4	Screw
15	AW00-40-15-4-4	Cable connector
16	AW00-40-15-4-4	Nut
17	AW00-40-15-4-4	Spring
18	AW00-40-15-4-4	Pinning
19	AW00-40-15-4-4	Nut
20	AW00-40-15-4-4	Screw
21	AW00-40-15-4-4	Pinning (USA)
22	AW00-40-15-4-4	Screw
23	AW00-40-15-4-4	Pinning
24	AW00-40-15-4-4	Pinning
25	AW00-40-15-4-4	Pinning
26	AW00-40-15-4-4	Pinning
27	AW00-40-15-4-4	Pinning
28	AW00-40-15-4-4	Pinning
29	AW00-40-15-4-4	Pinning
30	AW00-40-15-4-4	Pinning
31	AW00-40-15-4-4	Pinning
32	AW00-40-15-4-4	Pinning
33	AW00-40-15-4-4	Pinning
34	AW00-40-15-4-4	Pinning
35	AW00-40-15-4-4	Pinning
36	AW00-40-15-4-4	Pinning
37	AW00-40-15-4-4	Pinning
38	AW00-40-15-4-4	Pinning
39	AW00-40-15-4-4	Pinning
40	AW00-40-15-4-4	Pinning
41	AW00-40-15-4-4	Pinning
42	AW00-40-15-4-4	Pinning
43	AW00-40-15-4-4	Pinning
44	AW00-40-15-4-4	Pinning
45	AW00-40-15-4-4	Pinning
46	AW00-40-15-4-4	Pinning
47	AW00-40-15-4-4	Pinning
48	AW00-40-15-4-4	Pinning
49	AW00-40-15-4-4	Pinning
50	AW00-40-15-4-4	Pinning
51	AW00-40-15-4-4	Pinning
52	AW00-40-15-4-4	Pinning
53	AW00-40-15-4-4	Pinning
54	AW00-40-15-4-4	Pinning
55	AW00-40-15-4-4	Pinning
56	AW00-40-15-4-4	Pinning
57	AW00-40-15-4-4	Pinning
58	AW00-40-15-4-4	Pinning
59	AW00-40-15-4-4	Pinning
60	AW00-40-15-4-4	Pinning
61	AW00-40-15-4-4	Pinning
62	AW00-40-15-4-4	Pinning
63	AW00-40-15-4-4	Pinning
64	AW00-40-15-4-4	Pinning
65	AW00-40-15-4-4	Pinning
66	AW00-40-15-4-4	Pinning
67	AW00-40-15-4-4	Pinning
68	AW00-40-15-4-4	Pinning
69	AW00-40-15-4-4	Pinning
70	AW00-40-15-4-4	Pinning
71	AW00-40-15-4-4	Pinning
72	AW00-40-15-4-4	Pinning
73	AW00-40-15-4-4	Pinning
74	AW00-40-15-4-4	Pinning
75	AW00-40-15-4-4	Pinning
76	AW00-40-15-4-4	Pinning
77	AW00-40-15-4-4	Pinning
78	AW00-40-15-4-4	Pinning
79	AW00-40-15-4-4	Pinning
80	AW00-40-15-4-4	Pinning
81	AW00-40-15-4-4	Pinning
82	AW00-40-15-4-4	Pinning
83	AW00-40-15-4-4	Pinning
84	AW00-40-15-4-4	Pinning
85	AW00-40-15-4-4	Pinning
86	AW00-40-15-4-4	Pinning
87	AW00-40-15-4-4	Pinning
88	AW00-40-15-4-4	Pinning
89	AW00-40-15-4-4	Pinning
90	AW00-40-15-4-4	Pinning
91	AW00-40-15-4-4	Pinning
92	AW00-40-15-4-4	Pinning
93	AW00-40-15-4-4	Pinning
94	AW00-40-15-4-4	Pinning
95	AW00-40-15-4-4	Pinning
96	AW00-40-15-4-4	Pinning
97	AW00-40-15-4-4	Pinning
98	AW00-40-15-4-4	Pinning
99	AW00-40-15-4-4	Pinning
100	AW00-40-15-4-4	Pinning


[illegible]

Part No.		Drawing Name	
100	AM20-02	Rescue 30" (Self-insulated and with 32 insulation and 52 gas-efficiency)	Rescue 15" (Self-insulated) (rescue)
	AM20-03	Rescue 30" (Self-insulated and with 32 insulation and 52 gas-efficiency)	Rescue 15" (Self-insulated) (rescue)
	AM20-04	Rescue 30" (Self-insulated and with 32 insulation and 52 gas-efficiency)	Rescue 15" (Self-insulated) (rescue)
	AM20T-0122	Tapered Rescue 30" (Self-insulated and with 32 insulation and 52 gas-efficiency)	Rescue 30" (Self-insulated) (rescue)
	AM20-0170	Rescue 30" (Self-insulated and with 32 insulation and 52 gas-efficiency)	Rescue 30" (Self-insulated) (rescue)
	AM20-0330	Rescue 15" (Self-insulated and with 32 insulation and 52 gas-efficiency)	Rescue 30" (Self-insulated) (rescue)
	AM20-0370	Rescue 30" (Self-insulated and with 32 insulation and 52 gas-efficiency)	Rescue 30" (Self-insulated) (rescue)
101	AM20-02	Rescue 30" (Self-insulated) (rescue)	Heavy Duty Rescue 15" (Self-insulated) (rescue)
	AM20-020	Rescue 30" (Self-insulated) (rescue)	Heavy Duty Rescue 30" (Self-insulated) (rescue)

Part No.	Description	Length
NW00002	Nozzle 1/4"	
NW00006	Nozzle 3/8"	
NW00007	Tapered nozzle 1/4"	
NW00008	Nozzle 1/2"	
NW00009	Nozzle 3/4"	
NW00010	Nozzle 1/2" flush	
NW00014	Nozzle 1/2" 1/8" recessed	
NW00015	Nozzle 3/8" 1/8" recessed	
NW00016	Nozzle 5/8" flush	
NW00017	Nozzle 3/4" 1/8" recessed	
NW00018	Nozzle 1/2" flush	
NW00045	Nozzle 3/8" tapered copper	

Part No.	Description	Length
NW07000	Nozzle 1/2" tapered brass 1/8" recessed	
NW08010	Tp electrode	
NW08015	Stick holder	
NW08020	Tp electrode 1/8" 1/8"	
NW08025	Tp electrode 1/8" 1/8"	
NW08030	Tp electrode 1/8" 1/8"	
NW08017	Stick holder	
NW08018	Grounding (section MT049)	

NW403-01	Cylinder, 020"	
NW403-02	Cylinder, 030"	
NW403-03	Cylinder, 040"	
NW403-04	Cylinder, 050"	
NW403-05	Cylinder, 070"	
NW403-06	Cylinder, 110"	
NW403-1-30	H.D. Cylinder, 030"	
NW403-1-35	H.D. Cylinder, 035"	
NW403-1-40	H.D. Cylinder, 040"	
NW403-1-50	H.D. Cylinder, 050"	
NW403-1-60	H.D. Cylinder, 060"	
NW403-1-70	H.D. Cylinder, 070"	
NW403-1-110	H.D. Cylinder, 110"	
NW403-1-200	H.D. Cylinder, 200"	
NW403-0-01	Tapewinch, 020"	
NW403-0-30	Tapewinch, 030"	
NW403-0-40	Tapewinch, 040"	
NW403-0-50	Tapewinch, 050"	
NW403-0-60	Tapewinch, 060"	
NW403-0-70	Tapewinch, 070"	
NW403-0-30	H.D. Tapewinch, 030"	
NW403-0-35	H.D. Tapewinch, 035"	
NW403-0-40	H.D. Tapewinch, 040"	
NW403-0-45	H.D. Tapewinch, 045"	
NW403-0-50	H.D. Tapewinch, 050"	
NW403-0-110	H.D. Tapewinch, 110"	

Part No.	Description	Image
NW401-4-02	Std. nozzle 3/8"	
NW401-4-03	Std. nozzle 1/2"	
NW401-4-02	Std. nozzle 3/8"	
NW401-4-03	Std. nozzle 1/2"	
NW401-19-02	Wedge 1/2"	
NW401-40-02	Std. nozzle 1/2"	

Part No.	Description	Image
NW401-40-02	Nozzle 5/8"	
NW401-40-03	Nozzle 3/8"	
NW401-40-02	Nozzle 1/2"	
NW401-40-02	Nozzle 3/8"	
NW401-40-03	Nozzle 3/4"	
NW401-40-02	Nozzle 1/2"	
NW401-5-02	Nozzle 5/8"	
NW401-5-03	Nozzle 3/8"	

Part No.	Description	Image
NW401-0-02	H.D. nozzle 5/8"	
NW401-0-03	Std. nozzle 3/4"	
NW401-0-02	H.D. nozzle 3/8"	
NW401-0-02	H.D. nozzle 5/8"	
NW401-0-03	H.D. nozzle 3/4"	
NW401-0-02	Nozzle 5/8"	
NW401-0-02	Nozzle 5/8"	
NW401-0-02	Nozzle 1/2"	

Part No.	Description	Image
MMW-000-0128 Nozzle-Ø13		
MMW-000-0807 Nozzle-Ø17		
MMW-000-0127 Nozzle-Ø23		
MMW-000-0808 Nozzle-Ø13		
MMW-000-0130 Nozzle-Ø17		
MMW-000-0809 Nozzle-Ø13.5		
MMW-000-0716 Tip Holder		
MMW-000-0304 Tip Holder		
MMW-000-0102 Tip Holder		
MMW-000-0827 Gas Diffuser		
MMW-000-0715 Gas Diffuser		
MMW-000-0171 Tip Ring		
MMW-000-0830 Tip Ring		
MMW-000-0870 Tip Ring		

Part No.	Description	Image
MMW-0100-0005 Nozzle		
MMW-0100-0010 Nozzle		
MMW-0100-0018 Nozzle		
MMW-0100-0016 Nozzle		
MMW-0100-0019 Nozzle		
MMW-0000-0870 Gaswick		
MMW-0000-0876 Gaswick		
MMW-0000-0776 Gaswick		
TM04-000-1012 Gaswick		
TM04-000-1022 Gaswick		
TM04-000-1020 Gaswick		
TM04-000-0871 Gaswick		
TM04-000-1027 Gaswick		
TM04-000-1008 Gaswick		

TIG系列焊枪 (耗材及配件) TIG TORCH SERIES (CONSUMABLES)



WELCOME TO JOIN US

TIG-9 	M1.2x1  Technical data Cooling: Gas Cooled Duty 25%DC 135AMP Duty 35%AC 135AMP Electrode Size 0.5-1.6mm 技术参数 冷却方式: 气冷 额定 25% 负载率: 135AMP 额定 35% 负载率: 135AMP 电极尺寸 0.5-1.6mm	TIG-17 	3/8 G  Technical data Cooling: Gas Cooled Duty 35%DC 140AMP Duty 35%AC 120AMP Electrode Size 0.5-2.4mm 技术参数 冷却方式: 气冷 额定 35% 负载率: 140AMP 额定 35% 负载率: 120AMP 电极尺寸 0.5-2.4mm
TIG-18 	M1.2x1  1/4 G  3/8 G  Technical data Cooling: Gas Cooled Duty 100%DC 230AMP Duty 100%AC 240AMP Electrode Size 0.5-4.0mm 技术参数 冷却方式: 气冷 额定 100% 负载率: 230AMP 额定 100% 负载率: 240AMP 电极尺寸 0.5-4.0mm	TIG-20 	M1.2x1  1/4 G  3/8 G  Technical data Cooling: Gas Cooled Duty 100%DC 230AMP Duty 100%AC 220AMP Electrode Size 0.5-3.2mm 技术参数 冷却方式: 气冷 额定 100% 负载率: 230AMP 额定 100% 负载率: 220AMP 电极尺寸 0.5-3.2mm
TIG-24 	M1.2x1  3/8 G  Technical data Cooling: Gas Cooled Duty 35%DC 135AMP Duty 35%AC 135AMP Electrode Size 0.5-2.4mm 技术参数 冷却方式: 气冷 额定 35% 负载率: 135AMP 额定 35% 负载率: 135AMP 电极尺寸 0.5-2.4mm	TIG-26 	M1.2x1  3/8 G  Technical data Cooling: Gas Cooled Duty 35%DC 135AMP Duty 35%AC 135AMP Electrode Size 0.5-4.0mm 技术参数 冷却方式: 气冷 额定 35% 负载率: 135AMP 额定 35% 负载率: 135AMP 电极尺寸 0.5-4.0mm

WP 9 Series Torch Head Options
0.047"-5/32" / 1.0mm-2.0mm electrodes
Rating: 110A DC, 85A AC, 35%

Tig Torch Heads 氩弧焊枪枪头

NW-20-000V-QT01-00 WP 9	NW-20-000V-QT01-00 WP 9V	NW-20-000V-QT01-00 WP 9V	NW-20-000V-QT01-00 WP 9V
			

WP 17 Series Torch Head Options
0.047"-5/32" / 1.0mm-3.2mm electrodes
Rating: 135A DC, 95A AC, 35%

NW-20-001V-QT01-00 WP 17	NW-20-017V-QT01-00 WP 17V	NW-20-017V-QT01-00 WP 17V	NW-20-017V-QT01-00 WP 17V
			

WP 26 Series Torch Head Options
0.047"-5/32" / 1.0mm-3.2mm electrodes
Rating: 150A DC, 125A AC, 35%

NW-20-002V-QT01-00 WP 26	NW-20-002V-QT01-00 WP 26V	NW-20-002V-QT01-00 WP 26V	NW-20-002V-QT01-00 WP 26V
			

WP 20 Series Torch Head Options
0.047"-5/32" / 1.0mm-3.2mm electrodes
Rating: 207A DC, 160A AC, 100%

NW-20-002V-QT01-00 WP 20


WP 18 Series Torch Head Options
0.047"-5/32" / 1.0mm-3.2mm electrodes
Rating: 300A DC, 270A AC, 100%

NW-20-018V-QT01-00 WP 18	NW-20-018V-QT01-00 WP 18V
	

水冷电缆接头 (AirCooled PowerCableConnector)

* Power Cable Gas/Water Connector 水气电缆接头

M12X1	M14X1.5	3/8BSP	M16X1.5
			

7/16UNF	5/8-18UNF	3/8-24UNF
		

水冷电缆接头 (WaterCooled PowerCableConnector) 电缆接口 (PowerCableConnector)

M16X1.5	M12X1	7/8-14UNF
		




5/8 UNF LH	3/8BSP	M12X1	8.9快速接头
			

气接头 (GasConnector)

5/8-18 UNF	5/8-18 UNF LH	3/8BSP	1/4 BSP
			

M12X1	M10X1	8.9快速接头
		

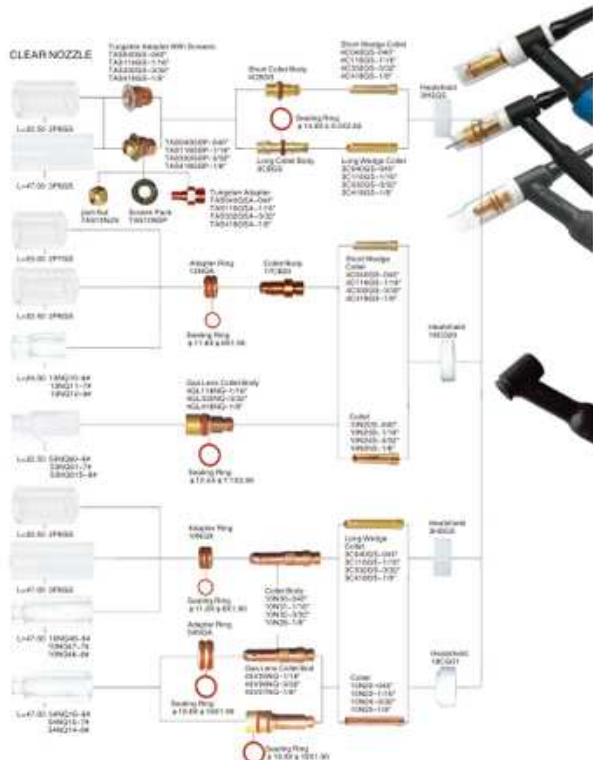

- Better gas coverage
- Better weld visibility
- Replaceable screens and tungsten adaptors
- Fits most standard torch bodies
- Lightweight design
- Offer superior temperature and thermal shock resistance




TOUCH SERIES	PART NO.	SIZE	DESCRIPTION	PHOTO OF KIT
WP-15 3F 3V 3FV WP-20 20F WP-25	WP1500 Large kit L=30.5		(INCLUDES): • Osmomize • Teflon gasket • Wadco coil • Cooler body • Tungsten adapter with screws • Sealing ring	
	WP1500 Large kit L=47			
	WP1500 Large kit L=30.5 Spliceman pack			
	WP1500 Large kit L=47 Spliceman pack			
WP-17 17V 17V 17V WP-26 26V 26F 26V 26F WP-16 16V 16F 16V 16F	WP171000 Large kit L=30.5	1/16" ± 1.6		
	WP171000 Large kit L=47	3/32" ± 2.4		
	WP171000 Large kit L=47	1/8" ± 3.2		
	WP171000 Large kit L=30.5 Spliceman pack			
	WP171000 Large kit L=47 Spliceman pack			
	WP171000 Large kit L=47 Spliceman pack			

WP-9/20 KITS



WP-17/18/26 LARGE KITS

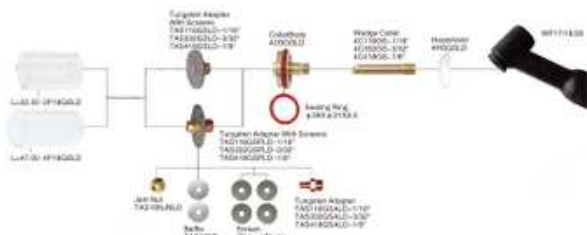

- Better gas coverage
- Better weld visibility
- Replaceable screens and tungsten adapter
- Fits most standard torch bodies
- Lightweight design
- Offer superior temperature and thermal shock resistance



TORCH SERIES	PART NO.	SIZE	DESCRIPTION	PHOTO OF KIT
WP-9/20 2V 9V/3P WP-25	WP900 Champagne nozzle kit with adapter	1/8" (ø 1.6) 3/32" (ø 2.4) 1/8" (ø 3.2)	INCLUDES: • Clean nozzle • Tungsten gasket • Welpie colorizer color • Gas lens colorizer • Screen pack with adapter or without adapter • Sealing ring	
	WP900 Champagne nozzle kit without adapter			
WP-17 17V/12V 17V/13P WP-26 26V/20V 26V/28P WP-18 18V/18V 18V/18P	WP171800 Champagne nozzle kit with adapter	1/8" (ø 1.6) 3/32" (ø 2.4) 1/8" (ø 3.2)		
	WP171800 Champagne nozzle kit without adapter			

等离子 (手动/自动) 系列切割枪及耗材配件
PLASMA (MANUAL / AUTOMATIC) CUTTING SERIES
TORCH & CONSUMABLES



WELCOME TO JOIN US

WITH HIGH FREQUENCY 高频



HAND TORCH

Plasma Cutting Torch P80-Vision (See DET/DA/GA/PT/DR) 等离子切割机 P80-Vision (See 中文说明)
Plasma Cutting Torch P80-Vision (See 200) 等离子切割机 P80-Vision (See 200)
Plasma Cutting Torch P80-Vision (See M-Hex 1) 等离子切割机 P80-Vision (See M-Hex 1)
Plasma Cutting Torch P80-Vision (See 140) 等离子切割机 P80-Vision (See 140)
Plasma Cutting Torch P80-Vision (See M-Hex 1) 等离子切割机 P80-Vision (See M-Hex 1)
Plasma Cutting Torch P80-Vision (See M-Hex 1) 等离子切割机 P80-Vision (See M-Hex 1)
Plasma Cutting Torch P80-Vision (See M-Hex 1) 等离子切割机 P80-Vision (See M-Hex 1)

MACHINE TORCH

Plasma auto torch P80-140 等离子切割机 P80-140
Plasma auto torch P80-140 等离子切割机 P80-140
Plasma auto torch P80-140 等离子切割机 P80-140
Plasma auto torch P80-140 等离子切割机 P80-140
Plasma auto torch P80-140 等离子切割机 P80-140

1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100

WITH HIGH FREQUENCY 高频



HAND TORCH

Plasma torch P80-140 等离子切割机 P80-140
Plasma torch P80-140 等离子切割机 P80-140

1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100

WITH HIGH FREQUENCY 高频

Technical data	技术参数
Current 额定电流	30 Amp
Duty Cycle 占空比	60%
Gas P/LR	AIR 空气
Gas Pressure 气压	4.5-6.5 Bar
Gas Flow 气流量	12.5 LPM
Ignition 引弧方式	AHF 高频
Shield Flow 气流量	40 l/min recommended 推荐40升
Standard Length 标准长度	3M

HAND TORCH

Plasma torch SG51 30A MP1.5 等离子切割机 SG51 30A MP1.5
Plasma torch SG51 30A MP1.5 等离子切割机 SG51 30A MP1.5 等离子切割机 SG51 30A MP1.5 等离子切割机

Technical data	技术参数
1	Outside nozzle SG51 外喷嘴 SG51
2	Tip 电极
2.1	Tip ø 1.0mm SG51 电极直径 ø 1.0mm SG51
2.2	Tip ø 1.0mm SG51 电极直径 ø 1.0mm SG51
3	Shielder SG51 屏蔽罩 SG51
4	Electrode SG51 电极 SG51
5	Plasma torch head SG51 等离子炬头 SG51
6	Switch for SG51 1500V P/N 开关按钮 SG51 1500V P/N
7	Label TIG, PLASMA/TC 开关按钮 TIG/PLASMA/TC, 40V/50V-01 TIG, PLASMA/TC
8	Shielding TIG ø 17-20 5mm TIG ø 17-20
9	Big spring support for TIG ø 19-20 大弹簧支撑 TIG ø 19-20
10	Cable assembly 电缆组
10.1	Cable assembly SG51 1500V/50A/30A MP1.5 电缆组 SG51 1500V/50A/30A MP1.5
10.2	Cable assembly SG51 1500V/50A/30A MP1.5 电缆组 SG51 1500V/50A/30A MP1.5 电缆组
11	Connector X P/N 17 接头
12	Protection net CHN 防触电保护罩 CHN

WITH HIGH FREQUENCY 高频


Technical data	技术参数
Current 额定电流	40 Amp
Duty Cycle 占空比	60%
Gas P/LR	AIR 空气
Gas Pressure 气压	3.5-4.5 Bar
Gas Flow 气流量	12.5 LPM
Ignition 引弧方式	AHF 高频
Shield Flow 气流量	40 l/min recommended 推荐40升
Standard Length 标准长度	3M

HAND TORCH

Plasma torch SG55 40A MP1.5 等离子切割机 SG55 40A MP1.5
Plasma torch SG55 40A MP1.5 等离子切割机 SG55 40A MP1.5 等离子切割机 SG55 40A MP1.5 等离子切割机

Technical data	技术参数
1	Outside nozzle SG55 外喷嘴 SG55
2	Tip 电极
2.1	Tip ø 1.0mm SG55 电极直径 ø 1.0mm SG55
2.2	Tip ø 1.0mm SG55 电极直径 ø 1.0mm SG55
2.3	Tip ø 1.0mm SG55 电极直径 ø 1.0mm SG55
3	Tip ø 1.0mm SG55 电极直径 ø 1.0mm SG55
4	Shielder SG55 屏蔽罩 SG55
5	Switch for SG55 1500V P/N 开关按钮 SG55 1500V P/N
6	Label TIG, PLASMA/TC 开关按钮 TIG/PLASMA/TC, 40V/50V-01 TIG, PLASMA/TC
7	Shielding TIG ø 17-20 5mm TIG ø 17-20
8	Big spring support for TIG ø 19-20 大弹簧支撑 TIG ø 19-20
9	Cable assembly 电缆组
9.1	Cable assembly SG55 1500V/50A/40A MP1.5 电缆组 SG55 1500V/50A/40A MP1.5
9.2	Cable assembly SG55 1500V/50A/40A MP1.5 电缆组 SG55 1500V/50A/40A MP1.5 电缆组
10	Connector X P/N 17 接头
11	Protection net CHN 防触电保护罩 CHN
12	CHN 防触电保护罩 CHN

WITH HIGH FREQUENCY 高频

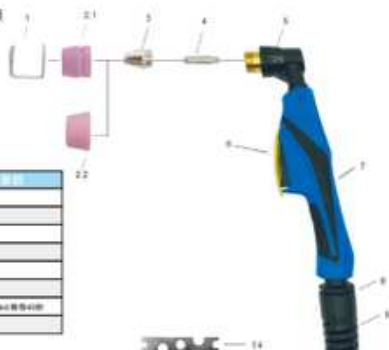


English	Chinese
Current 额定电流	60 Amp
Duty Cycle 占空比	60%
Gas 气体	ARG 氩气
Gas Pressure 气压	3.5-4.5 bar
Gas Flow 气流量	10-15 LPM
Ignition 引弧方式	HF 高频
Pilot Flow 气流量	40 sec recommended 推荐40秒
Standard Length 标准长度	5M

HAND TORCH

Phonix torch AG60M 11.5, 60A 1.5m 1.5m AG60M 11.5

English	Chinese
1	Special wiring for AG60 特殊接线
2	Outside handle 手柄
2.1	Outside handle with pressure sensor AG60 带压力传感器的手柄 AG60
2.2	Outside handle without pressure sensor AG60 不带压力传感器的手柄 AG60
3	Tip 喷嘴
3.1	Tip ø 5.0mm AG60 喷嘴 ø 5.0mm AG60
3.2	Tip ø 4.0mm AG60 喷嘴 ø 4.0mm AG60
3.3	Tip ø 3.0mm AG60 喷嘴 ø 3.0mm AG60
3.4	Tip ø 2.0mm AG60 喷嘴 ø 2.0mm AG60
4	Electrode AG60 电极 AG60
5	Phonix torch head AG60 with or without pressure sensor AG60 带或不带压力传感器的 AG60 手柄头
6	Adapter for AG60 AG60 适配器 AG60
7	Phonix handle for AG60 AG60 手柄 AG60
8	AG60 AG60 喷嘴 AG60
9	Special wiring for AG60 11.5m 1.5m 1.5m
10	Special wiring for AG60 11.5m 1.5m 1.5m
10.1	Special wiring for AG60 11.5m 1.5m 1.5m
10.2	Special wiring for AG60 11.5m 1.5m 1.5m
11	Special wiring for AG60 11.5m 1.5m 1.5m
12	Special wiring for AG60 11.5m 1.5m 1.5m
13	Special wiring for AG60 11.5m 1.5m 1.5m
14	Special wiring for AG60 11.5m 1.5m 1.5m

WITH HIGH FREQUENCY 高频

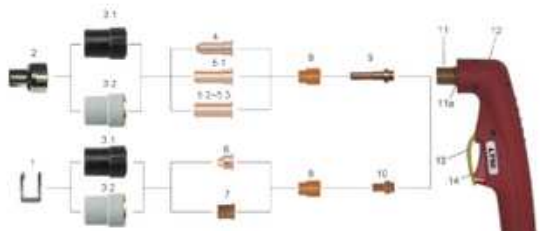

MACHINE TORCH 自动枪



18.1	1/4"
18.2	M14X1.5
18.3	M16X1.5
18.4	Central adapter 中央接头

English	Chinese
Current 额定电流	60 Amp
Duty Cycle 占空比	60%
Gas 气体	ARG 氩气
Gas Pressure 气压	3.5-4.5 bar
Gas Flow 气流量	10-15 LPM
Ignition 引弧方式	HF 高频
Pilot Flow 气流量	40 sec recommended 推荐40秒
Standard Length 标准长度	5M



HAND TORCH


Plasma cutting torch L7500en 1.5G 等离子切割炬 L7500en 1.5G
Plasma cutting torch L7500en 1.5G 等离子切割炬 L7500en 1.5G
Plasma cutting torch L7500en M14 x 1.5 等离子切割炬 L7500en M14 x 1.5
Plasma cutting torch L7500en M14 x 1.5 等离子切割炬 L7500en M14 x 1.5
Plasma cutting torch L7500en central adaptor 等离子切割炬 L7500en 中央接头

MACHINE TORCH

Plasma cutting auto torch L7500en 1.5G 等离子切割炬 L7500en 1.5G
Plasma cutting auto torch L7500en 1.5G 等离子切割炬 L7500en 1.5G
Plasma cutting auto torch L7500en M14 x 1.5 等离子切割炬 L7500en M14 x 1.5
Plasma cutting auto torch L7500en central adaptor 等离子切割炬 L7500en 中央接头

1	Double pointed spark/L770 双尖火花 L770
2	Spark spring/L770 火花弹簧 L770
3	Break cap for electrode/L770 电极帽 L770
4	Electrode holder 电极夹
4.1	Double pointed spark/L770 双尖火花 L770
4.2	Double pointed spark/L770 双尖火花 L770
5	Tip 喷嘴
5.1	Tip ø 0.8mm, L750-750 x 11mm 喷嘴 ø 0.8mm, L750-750 x 11mm
5.2	Tip ø 1.0mm, L750-750 x 12.2mm 喷嘴 ø 1.0mm, L750-750 x 12.2mm
5.3	Tip ø 1.1mm, L750-750 x 12.2mm 喷嘴 ø 1.1mm, L750-750 x 12.2mm
5.4	Tip ø 1.2mm, L750-750 x 12.2mm 喷嘴 ø 1.2mm, L750-750 x 12.2mm
6	Tip 喷嘴
6.1	Tip ø 0.8mm, L750-750 x 11mm 喷嘴 ø 0.8mm, L750-750 x 11mm
6.2	Tip ø 1.0mm, L750-750 x 12.2mm 喷嘴 ø 1.0mm, L750-750 x 12.2mm
7	Tip 喷嘴
7.1	Extended tip ø 1.0mm, L750-750 加长喷嘴 ø 1.0mm, L750-750
7.2	Extended tip ø 1.2mm, L750-750 加长喷嘴 ø 1.2mm, L750-750
8	Tip 喷嘴
8.1	Extended tip ø 1.0mm, L750-750 加长喷嘴 ø 1.0mm, L750-750
8.2	Extended tip ø 1.2mm, L750-750 加长喷嘴 ø 1.2mm, L750-750
9	Diffuser L750-750 扩散器 L750-750
10	Electrode holder L750 电极夹 L750
11	Extended electrode holder Plasma L770 加长电极夹 L770
12	Air torch L770 空气炬 L770
13	Plasma torch head L770 等离子炬头 L770
13a	13a ø 12.4x1.78mm air electrode L770 13a ø 12.4x1.78mm 空气电极
14	Plasma torch head L770 等离子炬头 L770
15	Protection part Plasma/Vinco 保护罩 L770 等离子炬头 L770
16	Trigger 触发器
17	Anti-splash hose L770 防飞溅软管 L770
18	Cable assembly 电缆组
18.1	Cable assembly L750-750 1.5G 1.5G 等离子炬头 L750-750 1.5G
18.2	Cable assembly L750-750 1.5G 1.5G 等离子炬头 L750-750 1.5G
18.3	Cable assembly L750-750 1.5G 1.5G 等离子炬头 L750-750 1.5G
18.4	Cable assembly L750-750 1.5G 1.5G 等离子炬头 L750-750 1.5G
19	Scanner for Plasma 等离子扫描仪
20	Plasma torch head L770 等离子炬头 L770
20a	Filter glass protection tube L770 过滤器 L770
21	Adaptor 适配器
21.1	Connecting adaptor L750-1.5G 1.5G 等离子炬头 L750-1.5G
21.2	Connecting adaptor L750-1.5G 1.5G 等离子炬头 L750-1.5G
21.3	Central adaptor torch side Plasma 3 pin 中央适配器 L750-1.5G
22	Cable cutting attachment L770 切割附件 L770
22.1	Wireless power with spark/L770 无线电源 L770

WITH HIGH FREQUENCY 高频

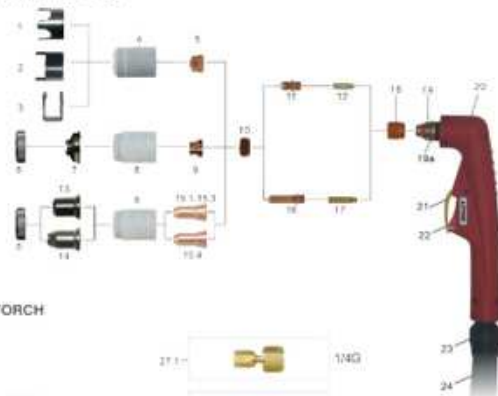

MACHINE TORCH 自动枪



Technical	中文 参数
Current 额定电流	100 Amp
Duty Cycle 占空比	60%
Gas 气体	ARGON
Gas Pressure 气压	4.0-6.0 bar
Gas Flow 流量	160 LPM
Ignition 点火方式	RF 高频
Post Flow 后吹气	100 sec. recommended 100秒
Standard Length 标准长度	900

25



COMPLETE TORCH

Plasma torch PT20C-400 Direct 2 wires with 2 pins for PT20C-400 Back Striking
Plasma torch PT20C-400 Direct 2 wires Back Striking with 2 pins for PT20C-400 Back Striking
Plasma torch PT20C-400 Direct 2 wires Back Striking with 2 pins for PT20C-400 Back Striking
Plasma torch PT20C-400 Direct 2 wires Back Striking with 2 pins for PT20C-400 Back Striking

1	Outside nozzle 喷嘴
1.1	Outside nozzle PT20C 2 holes Back Striking 喷嘴 PT20C 2孔
1.2	Outside nozzle PT20C 2 holes glass fiber Back Striking 喷嘴 PT20C 2孔玻璃纤维
2	Tip 喷嘴
2.1	Tip 0.6mm DIA PT20C 喷嘴 0.6mm DIA PT20C
2.2	Tip 0.8mm DIA PT20C 喷嘴 0.8mm DIA PT20C
3	Tip 喷嘴
3.1	Tip 0.6mm DIA PT20C Back Striking 喷嘴 0.6mm DIA PT20C
3.2	Tip 0.8mm DIA PT20C Back Striking 喷嘴 0.8mm DIA PT20C
4	Extended tip 加长喷嘴
4.1	Extended tip 0.6mm DIA PT20C Back Striking 加长喷嘴 0.6mm DIA PT20C
4.2	Extended tip 0.8mm DIA PT20C Back Striking 加长喷嘴 0.8mm DIA PT20C
5	Electrode PT20C-400 电极 PT20C-400
6	Electrode PT20C-400 电极 PT20C-400
7	Electrode PT20C-400 Back Striking 电极 PT20C-400
8	Electrode PT20C-400 Back Striking 电极 PT20C-400
9	SPR-4500 HAND TORCH HEAD SPR-4500 手持喷嘴
10	FLAMEA handle material PT20-400 手柄材料 PT20-400
11	Proprietary gas flow valve 专利气流阀
12	Trigger 开关
13	Joint mechanism type 3 连接机构
14	Cable assembly 电缆
14.1	Cable assembly PT20C-20 4M2 wheel head Direct 电缆 PT20C-20 4M2 轮头直连
14.2	Cable assembly PT20C-20 4M2 wheel head Back Striking 电缆 PT20C-20 4M2 轮头背连
15	Sparker for Plasma 等离子点火器
16	Cable cutting attachment 电缆切割附件
16.1	Rubber wheel PT20C-400 with sparker 橡胶轮 PT20C-400 带点火器
17	Cable cutting attachment PT20C-400 电缆切割附件 PT20C-400
17.1	Wheel sparker with sparker PT20C-400 橡胶轮 PT20C-400 带点火器

WITHOUT HIGH FREQUENCY 非高频



For the correct operation please use:
3-Ways Solenoid Valve inside office 2.3-2.7mm


Technical	中文
Current 额定电流	40 Amp
Duty Cycle 占空比	50%
Gas 气体	ARG 氩气
Gas Pressure 气压	4.3-5.0 Bar
Gas Flow 气流量	120-150 LPM
Ignition 引燃方式	without HF 非高频
Fluid Flow 流体流量	30 psi, recommended 建议设计
Standard Length 标准长度	4M

COMPLETE TORCH Reminder: The no.21 part cannot be used for the back striking torch. (注: 配件21不能用于背面打击焊炬。)

Accessories (配件): 1) Backing shield and back striking torch (背面打击焊炬)	Accessories (配件): 2) Back striking torch (背面打击焊炬)
Accessories (配件): 3) Backing shield and back striking torch (背面打击焊炬)	Accessories (配件): 4) Back striking torch (背面打击焊炬)
Accessories (配件): 5) Backing shield and back striking torch (背面打击焊炬)	Accessories (配件): 6) Back striking torch (背面打击焊炬)
Accessories (配件): 7) Backing shield and back striking torch (背面打击焊炬)	Accessories (配件): 8) Back striking torch (背面打击焊炬)
Accessories (配件): 9) Backing shield and back striking torch (背面打击焊炬)	Accessories (配件): 10) Back striking torch (背面打击焊炬)

Accessories (配件)	Accessories (配件)
1 Double pointed spacer 双面支脚	11 Double pointed spacer 双面支脚
1.1 Double pointed spacer 双面支脚	1.2 Double pointed spacer 双面支脚
2 Outside nozzle 喷嘴	2.1 Outside nozzle 喷嘴
2.2 Outside nozzle 喷嘴	2.3 Outside nozzle 喷嘴
3 Tip 喷嘴	3.1 Tip 喷嘴
3.2 Tip 喷嘴	3.3 Tip 喷嘴
4 Tip 喷嘴	4.1 Tip 喷嘴
4.2 Tip 喷嘴	4.3 Tip 喷嘴
4.4 Tip 喷嘴	4.5 Tip 喷嘴
5 Tip 喷嘴	5.1 Tip 喷嘴
5.2 Tip 喷嘴	5.3 Tip 喷嘴
6 Tip 喷嘴	6.1 Tip 喷嘴
6.2 Tip 喷嘴	6.3 Tip 喷嘴
7 Tip 喷嘴	7.1 Tip 喷嘴
7.2 Tip 喷嘴	7.3 Tip 喷嘴
8 Tip 喷嘴	8.1 Tip 喷嘴
8.2 Tip 喷嘴	8.3 Tip 喷嘴
9 Tip 喷嘴	9.1 Tip 喷嘴
9.2 Tip 喷嘴	9.3 Tip 喷嘴
10 Tip 喷嘴	10.1 Tip 喷嘴
10.2 Tip 喷嘴	10.3 Tip 喷嘴
11 Tip 喷嘴	11.1 Tip 喷嘴
11.2 Tip 喷嘴	11.3 Tip 喷嘴
12 Tip 喷嘴	12.1 Tip 喷嘴
12.2 Tip 喷嘴	12.3 Tip 喷嘴
13 Tip 喷嘴	13.1 Tip 喷嘴
13.2 Tip 喷嘴	13.3 Tip 喷嘴
14 Tip 喷嘴	14.1 Tip 喷嘴
14.2 Tip 喷嘴	14.3 Tip 喷嘴
15 Tip 喷嘴	15.1 Tip 喷嘴
15.2 Tip 喷嘴	15.3 Tip 喷嘴
16 Tip 喷嘴	16.1 Tip 喷嘴
16.2 Tip 喷嘴	16.3 Tip 喷嘴
17 Tip 喷嘴	17.1 Tip 喷嘴
17.2 Tip 喷嘴	17.3 Tip 喷嘴
18 Tip 喷嘴	18.1 Tip 喷嘴
18.2 Tip 喷嘴	18.3 Tip 喷嘴
19 Tip 喷嘴	19.1 Tip 喷嘴
19.2 Tip 喷嘴	19.3 Tip 喷嘴
20 Tip 喷嘴	20.1 Tip 喷嘴
20.2 Tip 喷嘴	20.3 Tip 喷嘴
21 Tip 喷嘴	21.1 Tip 喷嘴
21.2 Tip 喷嘴	21.3 Tip 喷嘴
22 Tip 喷嘴	22.1 Tip 喷嘴
22.2 Tip 喷嘴	22.3 Tip 喷嘴
23 Tip 喷嘴	23.1 Tip 喷嘴
23.2 Tip 喷嘴	23.3 Tip 喷嘴
24 Tip 喷嘴	24.1 Tip 喷嘴
24.2 Tip 喷嘴	24.3 Tip 喷嘴
25 Tip 喷嘴	25.1 Tip 喷嘴
25.2 Tip 喷嘴	25.3 Tip 喷嘴

WITHOUT HIGH FREQUENCY 非高频

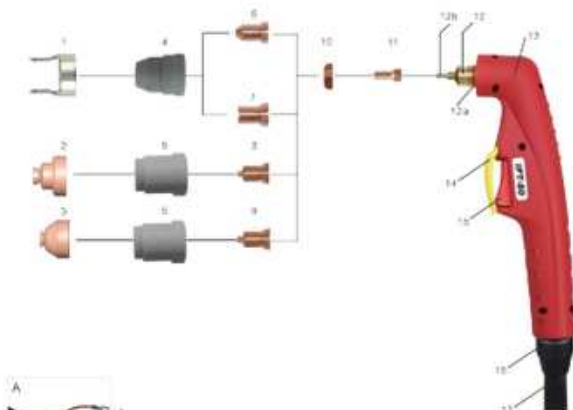

For the correct operation please use:
3-Ways Solenoid Valve inside office 2.7-3.0mm


Current 额定电流	Current 额定电流
Duty Cycle 占空比	60%
Gas 气体	Acetylene 乙炔
Gas Pressure 气压	4.5-5.5 Bar
Gas Flow 气流	1.0-1.5 L/min
Ignition 点火方式	Without HF 非高频
Post Flow 气流	20 sec. recommended 建议20秒
Standard Length 标准长度	600mm

COMPLETE TORCH

Photo torch PT80/80H 14kV integrated wiretorch striking 光电手把集成PT80/80H 14kV 光电—集成式点火枪
Photo torch PT80/120H 14kV integrated wiretorch striking 光电手把集成PT80/120H 14kV 光电—集成式点火枪
Photo torch PT80/120H center adaptor wiretorch striking 光电手把中心适配器PT80/120H中心集成式点火枪
Photo torch PT80/120H remote adaptor wiretorch striking 光电手把远程适配器PT80/120H远程集成式点火枪
Photo torch PT80/120H remote adaptor wiretorch striking 光电手把远程适配器PT80/120H远程集成式点火枪
Photo torch PT80/120H remote adaptor wiretorch striking 光电手把远程适配器PT80/120H远程集成式点火枪

1	Double pointed spark IPT80 striking 两点式集成PT80点火枪
2	Shield cap IPT80 Contact cutting/backing striking 喷嘴保护罩IPT80接触切割/背面
3	Shield cap IPT80 Contact cutting/backing striking 喷嘴保护罩IPT80接触切割/背面
4	Outside round IPT80 gas glass fiber shield cap IPT80 外部圆罩
5	Outside round IPT80 Contact cutting/backing striking 外部圆罩IPT80接触切割/背面
6	Top cover 顶部盖
6.1	Top cap 1.5mm SGA IPT80 back striking 顶部盖帽 1.5mm SGA IPT80 背面
6.2	Top cap 1.5mm SGA IPT80 back striking 顶部盖帽 1.5mm SGA IPT80 背面
6.3	Top cap 1.5mm SGA IPT80 back striking 顶部盖帽 1.5mm SGA IPT80 背面
6.4	Top cap 1.5mm SGA IPT80 back striking 顶部盖帽 1.5mm SGA IPT80 背面
7	Top cap 1.5mm SGA IPT80 Contact cutting/backing striking 顶部盖帽 1.5mm SGA IPT80 接触切割/背面
8	Top cover 顶部盖
8.1	Contact top 1.5mm SGA IPT80 back striking 接触顶部盖帽 1.5mm SGA IPT80 背面
8.2	Contact top 1.5mm SGA IPT80 back striking 接触顶部盖帽 1.5mm SGA IPT80 背面
8.3	Contact top 1.5mm SGA IPT80 back striking 接触顶部盖帽 1.5mm SGA IPT80 背面
8.4	Contact top 1.5mm SGA IPT80 back striking 接触顶部盖帽 1.5mm SGA IPT80 背面
9	Top cap 1.5mm SGA IPT80 gas glass fiber shield cap 顶部盖帽 1.5mm SGA IPT80 气体纤维罩
9a	Diffuser IPT80 扩散器IPT80
10	Exhaust IPT80 back striking 排气罩 顶部盖帽 1.5mm SGA IPT80 背面
11	Exhaust IPT80 back striking 排气罩 顶部盖帽 1.5mm SGA IPT80 背面
12	"O" ring IPT80 back striking 1.5mm SGA IPT80 背面
13	Air tube IPT80 back striking 1.5mm SGA IPT80 背面
14	Protection part IPT80 back striking 1.5mm SGA IPT80 背面
15	Trigger 扳机
16	Ignition switch IPT80 back striking 1.5mm SGA IPT80 背面
17	Cable assembly IPT80 back striking 1.5mm SGA IPT80 背面
17.1	Cable assembly IPT80 back striking 1.5mm SGA IPT80 背面
17.2	Cable assembly IPT80 back striking 1.5mm SGA IPT80 背面
17.3	Cable assembly IPT80 back striking 1.5mm SGA IPT80 背面
17.4	Cable assembly IPT80 back striking 1.5mm SGA IPT80 背面
17.5	Cable assembly IPT80 back striking 1.5mm SGA IPT80 背面
19	Sparkler IPT80 back striking 1.5mm SGA IPT80 背面
19	Sparkler IPT80 back striking 1.5mm SGA IPT80 背面
20	Ignition switch IPT80 back striking 1.5mm SGA IPT80 背面
20.1	Holder IPT80 back striking 1.5mm SGA IPT80 背面

WITHOUT HIGH FREQUENCY 非高频

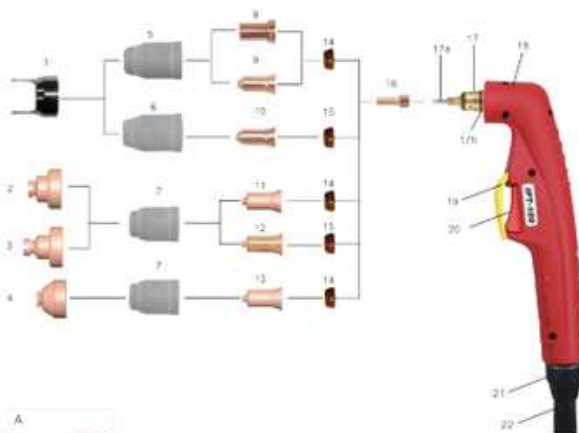

For the correct operation please use:
3-Way Solenoid Valve, inside orifice 2.5-4 Gmm


	1000 1000 1000 1000
Current 额定电流	400 Amp
Duty Cycle 占空比	60%
Gas 气体	60% Ar, 40% He
Gas Pressure 气压	4.5-5.5 bar
Gas Flow 气流	20-30 L/min
Ignition 点火方式	Without HF 非高频
Flow Rate 流量	400 ml, recommended 推荐 100ml
Maximal Length 最大长度	800 mm

COMPLETE TORCH

[illegible]

3	Double postmilling laserPT100 精密激光PT100
9	Double edge-PTA welded cutting 雙面激光切割-75A 雙面切割
9	Shield case 300-125A control cutting 雙面精密切割-125A 雙面控制
6	Shield capping 雙面精密防塵罩
8	DoublePT100/30-75A Gray glass fiber 雙面玻璃PT100/30-75A 灰色光纖
8	Double edgePT100/30-125A Gray glass fiber 雙面玻璃PT100/30-125A 灰色光纖
7	Double isolate PT100Contact cut and grinding 雙面精密PT100精密磨切
8	Top 90° 8mm control cutting 30-75A Glass grinding 30mm 30-75A 頂面
8	Top 90° 8mm control cutting 30-75A Glass grinding 30mm 30-75A 頂面
8.1	Top 1° 1mm/30A/PT100 back striking 後端精密磨切 1mm/30A/PT100 頂面
8.2	Top 1° 1mm/30A/PT100 back striking 後端精密磨切 1mm/30A/PT100 頂面
8.3	Top 1° 2mm/75A/PT100 back striking 後端精密磨切 2mm/75A/PT100 頂面
10	Top 雙面
10.1	Top 1° 4mm/30A/PT100 back striking 後端精密磨切 1° 4mm/30A/PT100 頂面
10.2	Top 1° 5mm/105A/PT100 back striking 後端精密磨切 1° 5mm/105A/PT100 頂面
10.3	Top 1° 6mm-105A-105A/PT100 back striking 後端精密磨切 1° 6mm-105A/PT100 頂面
11	Top 雙面磨切
11.1	Contact top 1.5mm/50A/PT100 back striking 後端精密磨切 1.5mm/50A/PT100 頂面磨切 1mm/50A/PT100 頂面
11.2	Contact top 1.5mm/50A/PT100 back striking 後端精密磨切 1.5mm/50A/PT100 頂面磨切 1mm/50A/PT100 頂面
11.3	Contact top 1.5mm/75A/PT100 back striking 後端精密磨切 1.5mm/75A/PT100 頂面磨切 1mm/75A/PT100 頂面
12	Contact 1° 4mm/50A/PT100 back striking 後端精密磨切 1° 4mm/50A/PT100 頂面
12.1	Contact top 1.5mm/105A/PT100 back striking 後端精密磨切 15mm/105A/PT100 頂面
12.2	Contact top 1.5mm/105A/PT100 back striking 後端精密磨切 15mm/105A/PT100 頂面
12.3	Contact top 1.5mm/105A-125A/PT100 back striking 後端精密磨切 15mm/105A-125A/PT100 頂面
12.3	Top grindingPT100/30A glass back striking 後端PT100/30A 頂面磨切
13	DiffuserPT100/30-75A cut grindingPT100 30-75A
14	DiffuserPT100/30-125A back grinding 後端磨切PT100/30-125A 光纖
15	Double postmillingPT100 精密激光PT100
16	PlasticizedPT100/30/PT100/30-75 塑料罩PT100/30/30/30
17	Air hose PT100 軟管PT100
17a	PT100 1/2 inch/PT100 3/8 inch 2 inch 1/2 inch PT100
18	PlasticizedPT100/30/PT100-125 塑料罩PT100 30 2 inch PT100 30
19	Protective packaging package 包裝塑料罩/包裝PT100
20	Trigger 扳機
21	Joint assembly 組合式
22	Cable assembly 電纜
22.1	Cable assemblyPT100/30V wire integrated 電纜PT100/30V 光纖-光纖
22.2	Cable assemblyPT100/125V wire integrated 電纜PT100/125 光纖-光纖
22.3	Cable assemblyPT100/42 wire control adapter 電纜PT100/42 光纖-光纖
22.4	Cable assemblyPT100/125 wire control adapter 電纜PT100/125 光纖-光纖
22.5	Cable assemblyPT100/42 wire control adapter 電纜PT100/42 光纖-光纖
22.6	Cable assemblyPT100/125 wire control adapter 電纜PT100/125 光纖-光纖
23	Sensor for Process 過程探測器
24	Control electric touch cable 控制電纜 電纜PT100 光纖
25	Cable cutting attachmentPT100 切割附件PT100
25.1	Ruler aboutPT100 cut with adapter 後端PT100 頂面

WITH HIGH FREQUENCY 高频

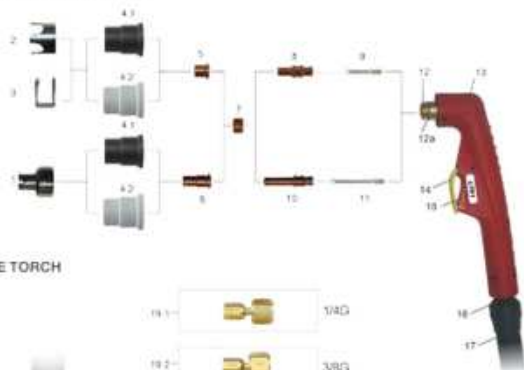

MACHINE TORCH
自动枪



Technique	Comment / 备注
Current 瞬时电流	80 Amp
Duty Cycle 占空比	60%
Gas 气体	ADR 空气
Gas Pressure 气压	4.5-5.0 Bar
Gas Flow 气流量	160L PM
Ignition 点火方式	147 高压
Post-Flow 气后延时	40 sec. recommended 推荐40秒
Maximum Length 最大长度	4M



HAND TORCH


Part	Accessories
1	Plasma cutting torch L781 6m 30G 等离子切割机 L781 6m 30G
2	Plasma cutting torch L781 6m M14 1.5 等离子切割机 L781 6m M14 1.5
3	Plasma cutting torch L781 6m M14 x 1.5 等离子切割机 L781 6m M14 x 1.5
4	Plasma cutting torch L781 6m remote adapter 等离子切割机 L781 6m 手持器
5	Plasma cutting torch L781 6m 14G 等离子切割机 L781 6m 14G

MACHINE TORCH

Part	Accessories
1	Plasma cutting torch L781 6m 30G 等离子切割机 L781 6m 30G
2	Plasma cutting torch L781 6m remote adapter 等离子切割机 L781 6m 手持器
3	Plasma cutting torch L781 6m 14G 等离子切割机 L781 6m 14G
4	Plasma cutting torch L781 6m M14 1.5 等离子切割机 L781 6m M14 1.5
5	Plasma cutting torch L781 6m M14 x 1.5 等离子切割机 L781 6m M14 x 1.5

Part	Accessories
1	Spacer for center cutting L781 等离子切割机中心轴 L781
2	Four pointed spacer L781 四点支撑 L781
3	Spacer spring L781 弹簧 L781
4	Outside nozzle 喷嘴
4.1	Outside nozzle bakelite L781 喷嘴 绝缘 L781
4.2	Outside nozzle aluminum die gray glass 10x15 L781 喷嘴 铝灰合金玻璃 L781
5	Tig 喷嘴
5.1	Tig p 1.2mm L781 喷嘴 p 1.2mm L781
5.2	Tig p 1.6mm L781 喷嘴 p 1.6mm L781
5.3	Tig p 2.0mm L781 喷嘴 p 2.0mm L781
5.4	Tig 喷嘴
5.5	Extended tip p 1.2mm L781 喷嘴延伸 p 1.2mm L781
5.6	Extended tip p 1.6mm L781 喷嘴延伸 p 1.6mm L781
7	Diffuser L781 喷嘴 L781
8	Electrode Plasma L781 等离子喷嘴 L781
9	Art tube L781 喷嘴 L781
10	Electrode electrode Plasma L781 等离子喷嘴 L781
11	Extended art tube L781 喷嘴延伸 L781
12	Plasma torch head L781 等离子喷嘴 L781
13	*O* ring p 15.8x1.78mm outer O ring p 15.8x1.78mm 密封
14	Plasma torch head M14x1.5 remote adapter 等离子切割机手持器
15	Protective part Plasma torch 等离子切割机保护罩
16	Trigger 开关
17	Control cable type 等离子切割机
17.1	Cable assembly 电缆
17.2	Cable ASSEMBLY L781 15M20M ATT 1.5G 电缆 L781 15M20M ATT 1.5G
17.3	Cable ASSEMBLY L781 15M20M CENTER ADAPTOR 电缆 L781 15M20M 中心轴
17.4	Cable ASSEMBLY L781 15M20M ATT 1.5G 电缆 L781 15M20M ATT 1.5G
17.5	Cable ASSEMBLY L781 15M20M CENTER ADAPTOR 电缆 L781 15M20M 中心轴
18	Plasma torch head L781 等离子喷嘴 L781
18a	Fiber glass protection tube L781 喷嘴保护 L781
19	Adapter 接头
19.1	Connecting adapter 11G-14G 喷嘴接头 11G-14G
19.2	Connecting adapter 11G-21G 喷嘴接头 11G-21G
19.3	Connecting adapter 11G-M14x1.5 喷嘴接头 11G-M14x1.5
19.4	Connecting adapter 11G-M14x1.5 喷嘴接头 11G-M14x1.5
19.5	Center support torch with Plasma 2 pin 等离子切割机中心轴
20	Circle cutting attachment L781 喷嘴附件 L781
21.1	Wire spool with spooler A81 5% 线圈支架 A81 5% 线圈

WITH HIGH FREQUENCY 高频

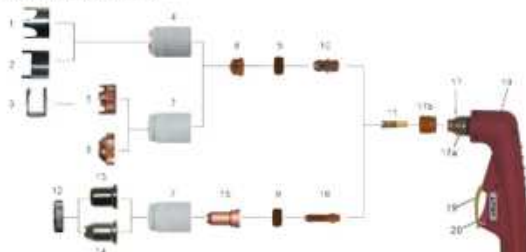

MACHINE TORCH 自动枪



Part	Accessories
Current 额定电流	150 Amp
Duty Cycle 占空比	50%
Gas 气体	Ar 80%
Gas Pressure 气压	4.5-5.5 bar
Gas Flow 流量	100-150 l/h
Ignition 引弧方式	RF 高频
Pre Flow 气流控制	100 sec. recommended 100秒
Standoff Length standoff 长度	100



HAND TORCH


Plasma cutting torch, L71016m-MH16, 等离子切割机 L71016m-MH16
Plasma cutting torch, L71016m-SB16, 等离子切割机 L71016m-SB16
Plasma cutting torch, L71016m-center adaptor, 等离子切割机 L71016m-中心适配器
Plasma cutting torch, L71016m-MH16, 等离子切割机 L71016m-MH16
Plasma cutting torch, L71016m-14G, 等离子切割机 L71016m-14G

MACHINE TORCH

Plasma cutting torch, L7M1016m-MH16, 等离子切割机 L7M1016m-MH16
Plasma cutting torch, L7M1016m-center adaptor, 等离子切割机 L7M1016m-中心适配器
Plasma cutting torch, L7M1016m-14G, 等离子切割机 L7M1016m-14G
Plasma cutting torch, L7M1016m-SB16, 等离子切割机 L7M1016m-SB16
Plasma cutting torch, L7M1016m-MH16, 等离子切割机 L7M1016m-MH16

1	Plasma cutting torch, L7100-100, 等离子切割机 L7100-100
2	Double port electrode, L7100-100, 双孔电极 L7100-100
3	Electrode cap, L7100-100, 电极帽 L7100-100
4	Double nozzle, L7100-100, 双喷嘴 L7100-100
5	Fast electrode holder, L7100-100, 快速电极夹 L7100-100
6	Spacer for electrode, L7100-100, 电极间距 L7100-100
7	Contact nozzle, L7100-100, 接触喷嘴 L7100-100
8	Tip, L7100-100, 喷嘴 L7100-100
9	Tip, L7100-100, 喷嘴 L7100-100
10	Tip, L7100-100, 喷嘴 L7100-100
11	Tip, L7100-100, 喷嘴 L7100-100
12	Tip, L7100-100, 喷嘴 L7100-100
13	Tip, L7100-100, 喷嘴 L7100-100
14	Tip, L7100-100, 喷嘴 L7100-100
15	Tip, L7100-100, 喷嘴 L7100-100
16	Tip, L7100-100, 喷嘴 L7100-100
17	Tip, L7100-100, 喷嘴 L7100-100
18	Tip, L7100-100, 喷嘴 L7100-100
19	Tip, L7100-100, 喷嘴 L7100-100
20	Tip, L7100-100, 喷嘴 L7100-100
21	Tip, L7100-100, 喷嘴 L7100-100
22	Tip, L7100-100, 喷嘴 L7100-100
23	Tip, L7100-100, 喷嘴 L7100-100
24	Tip, L7100-100, 喷嘴 L7100-100
25	Tip, L7100-100, 喷嘴 L7100-100
26	Tip, L7100-100, 喷嘴 L7100-100
27	Tip, L7100-100, 喷嘴 L7100-100
28	Tip, L7100-100, 喷嘴 L7100-100
29	Tip, L7100-100, 喷嘴 L7100-100
30	Tip, L7100-100, 喷嘴 L7100-100
31	Tip, L7100-100, 喷嘴 L7100-100
32	Tip, L7100-100, 喷嘴 L7100-100
33	Tip, L7100-100, 喷嘴 L7100-100
34	Tip, L7100-100, 喷嘴 L7100-100
35	Tip, L7100-100, 喷嘴 L7100-100
36	Tip, L7100-100, 喷嘴 L7100-100
37	Tip, L7100-100, 喷嘴 L7100-100
38	Tip, L7100-100, 喷嘴 L7100-100
39	Tip, L7100-100, 喷嘴 L7100-100
40	Tip, L7100-100, 喷嘴 L7100-100
41	Tip, L7100-100, 喷嘴 L7100-100
42	Tip, L7100-100, 喷嘴 L7100-100
43	Tip, L7100-100, 喷嘴 L7100-100
44	Tip, L7100-100, 喷嘴 L7100-100
45	Tip, L7100-100, 喷嘴 L7100-100
46	Tip, L7100-100, 喷嘴 L7100-100
47	Tip, L7100-100, 喷嘴 L7100-100
48	Tip, L7100-100, 喷嘴 L7100-100
49	Tip, L7100-100, 喷嘴 L7100-100
50	Tip, L7100-100, 喷嘴 L7100-100
51	Tip, L7100-100, 喷嘴 L7100-100
52	Tip, L7100-100, 喷嘴 L7100-100
53	Tip, L7100-100, 喷嘴 L7100-100
54	Tip, L7100-100, 喷嘴 L7100-100
55	Tip, L7100-100, 喷嘴 L7100-100
56	Tip, L7100-100, 喷嘴 L7100-100
57	Tip, L7100-100, 喷嘴 L7100-100
58	Tip, L7100-100, 喷嘴 L7100-100
59	Tip, L7100-100, 喷嘴 L7100-100
60	Tip, L7100-100, 喷嘴 L7100-100
61	Tip, L7100-100, 喷嘴 L7100-100
62	Tip, L7100-100, 喷嘴 L7100-100
63	Tip, L7100-100, 喷嘴 L7100-100
64	Tip, L7100-100, 喷嘴 L7100-100
65	Tip, L7100-100, 喷嘴 L7100-100
66	Tip, L7100-100, 喷嘴 L7100-100
67	Tip, L7100-100, 喷嘴 L7100-100
68	Tip, L7100-100, 喷嘴 L7100-100
69	Tip, L7100-100, 喷嘴 L7100-100
70	Tip, L7100-100, 喷嘴 L7100-100
71	Tip, L7100-100, 喷嘴 L7100-100
72	Tip, L7100-100, 喷嘴 L7100-100
73	Tip, L7100-100, 喷嘴 L7100-100
74	Tip, L7100-100, 喷嘴 L7100-100
75	Tip, L7100-100, 喷嘴 L7100-100
76	Tip, L7100-100, 喷嘴 L7100-100
77	Tip, L7100-100, 喷嘴 L7100-100
78	Tip, L7100-100, 喷嘴 L7100-100
79	Tip, L7100-100, 喷嘴 L7100-100
80	Tip, L7100-100, 喷嘴 L7100-100
81	Tip, L7100-100, 喷嘴 L7100-100
82	Tip, L7100-100, 喷嘴 L7100-100
83	Tip, L7100-100, 喷嘴 L7100-100
84	Tip, L7100-100, 喷嘴 L7100-100
85	Tip, L7100-100, 喷嘴 L7100-100
86	Tip, L7100-100, 喷嘴 L7100-100
87	Tip, L7100-100, 喷嘴 L7100-100
88	Tip, L7100-100, 喷嘴 L7100-100
89	Tip, L7100-100, 喷嘴 L7100-100
90	Tip, L7100-100, 喷嘴 L7100-100
91	Tip, L7100-100, 喷嘴 L7100-100
92	Tip, L7100-100, 喷嘴 L7100-100
93	Tip, L7100-100, 喷嘴 L7100-100
94	Tip, L7100-100, 喷嘴 L7100-100
95	Tip, L7100-100, 喷嘴 L7100-100
96	Tip, L7100-100, 喷嘴 L7100-100
97	Tip, L7100-100, 喷嘴 L7100-100
98	Tip, L7100-100, 喷嘴 L7100-100
99	Tip, L7100-100, 喷嘴 L7100-100
100	Tip, L7100-100, 喷嘴 L7100-100

WITH HIGH FREQUENCY: 高频

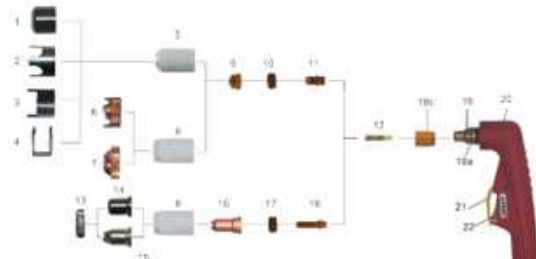

MACHINE TORCH 自动枪





Parameter 参数	Value 数值
Current 额定电流	140 Amp
Duty Cycle 占空比	50%
Gas Flow 气流	400 L/min
Gas Pressure 气压	4.0-5.0 Bar
Gas Flow 气流	200 L/min
Ignition 点火方式	高频
Fast Flow 快速	140 sec. recommended 140 sec
Standard Length 标准长度	500



COMPLETE TORCH

[illegible][illegible]

WITHOUT HIGH FREQUENCY 非高频

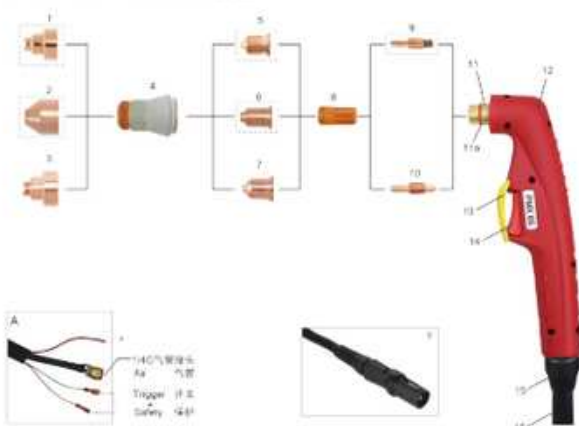

Technique	Comment / 评论
Current 额定电流	40 Amp
Duty Cycle 占空比	40%
Gas 气体	Ar/N ₂ , 混合气体
Gas Pressure 气压	5.0 Bar
Gas Flow 气流	140L /PM
Ignition 点火方式	90Watt RF 线圈
Vacuum 气流速度	60L/min, recommended 推荐10L
Desired Length 期望长度	500

COMPLETE TORCH

Plasma cutting torch PMX65-60M 14G separate 2 wire 等离子切割机 PMX65-60M 14G 分离二芯
Plasma cutting torch PMX65-60M 14G separate 2 wire 等离子切割机 PMX65-60M 14G 分离二芯
Plasma cutting torch PMX65-60M central adaptor 2 wire 等离子切割机 PMX65-60M 中央接头二芯
Plasma cutting torch PMX65-60M central adaptor 2 wire 等离子切割机 PMX65-60M 中央接头二芯
Plasma cutting torch PMX65-60M central adaptor central adaptor 等离子切割机 PMX65-60M 中央接头二芯
Plasma cutting torch PMX65-60M central adaptor central adaptor 等离子切割机 PMX65-60M 中央接头二芯
Plasma cutting torch PMX65-60M central adaptor central adaptor 等离子切割机 PMX65-60M 中央接头二芯

Item	Description
1	Shield cap 保护罩
2	Shield cap (sealing) 密封帽/气帽
3	Shield cap PMX65-60M 45A-65A-75A-85A-95A 密封帽 PMX65-60M 45A-65A-75A-85A-95A
4	Outside handle PMX65-60M 45A-65A-75A-85A-95A 外部手柄 PMX65-60M 45A-65A-75A-85A-95A
5	Tip 喷嘴
5.1	Tip 45A 喷嘴 45A
5.2	Tip 65A 喷嘴 65A
6	Tip (sealing) 密封帽/气帽
7	Tip 喷嘴
7.1	Tip 45A 喷嘴 45A-65A-75A-85A-95A 密封帽 PMX65-60M 45A-65A-75A-85A-95A
7.2	Tip 65A 喷嘴 65A-75A-85A-95A 密封帽 PMX65-60M 65A-75A-85A-95A
8	Switching PMX65-60M 45A-65A 切换开关 PMX65-60M 45A-65A
9	Electrode 电极
10	Electrode PMX65-60M 45A-65A 电极 PMX65-60M 45A-65A
11	Plasma cutting torch head PMX65-60M 14G 等离子切割头 PMX65-60M 14G
11a	11G 等离子切割头 PMX65-60M 11G
12	Plasma cutting torch head PMX65-60M 14G 等离子切割头 PMX65-60M 14G
13	Plasma cutting torch head PMX65-60M 14G 等离子切割头 PMX65-60M 14G
14	Trigger red 红色扳机开关 21 65A 红色
15	Trigger red 红色扳机开关 21 65A 红色
16	Cable assembly 电缆组
16.1	Cable assembly PMX65-60M 2 wire separate 电缆组 PMX65-60M 二芯分离
16.2	Cable assembly PMX65-60M 2 wire integrated 电缆组 PMX65-60M 二芯集成
16.3	Cable assembly PMX65-60M 2 wire central adaptor 电缆组 PMX65-60M 二芯中央接头
16.4	Cable assembly PMX65-60M 2 wire central adaptor 电缆组 PMX65-60M 二芯中央接头
16.5	Cable assembly PMX65-60M 2 wire central adaptor 电缆组 PMX65-60M 二芯中央接头
17	Cable adaptor electrode PLASMA 1 PMS 电缆接头电极 PMX65-60M

WITHOUT HIGH FREQUENCY 非高频



COMPLETE TORCH

Plasma cutting torch PMX105-04M 1/4" (6.35mm) 2 wire 等离子切割炬 PMX105-04M 1/4" (6.35mm) 二极炬
Plasma cutting torch PMX105-04M 1/4" (6.35mm) 2 wire 等离子切割炬 PMX105-04M 1/4" (6.35mm) 二极炬
Plasma cutting torch PMX105-04M control adapter 2 wire 等离子控制炬 PMX105-04M 二极炬
Plasma cutting torch PMX105-04M control adapter 2 wire 等离子控制炬 PMX105-04M 二极炬
Plasma cutting torch PMX105-04M control adapter control cable 等离子控制炬 PMX105-04M 二极炬 控制电缆
Plasma cutting torch PMX105-04M control cable 等离子控制炬 PMX105-04M 二极炬 控制电缆
Plasma cutting torch PMX105-04M control cable 等离子控制炬 PMX105-04M 二极炬 控制电缆
Plasma cutting torch PMX105-04M 1/4" (6.35mm) 2 wire 等离子切割炬 PMX105-04M 1/4" (6.35mm) 二极炬
Plasma cutting torch PMX105-04M control adapter 2 wire 等离子控制炬 PMX105-04M 二极炬
Plasma cutting torch PMX105-04M control adapter control cable 等离子控制炬 PMX105-04M 二极炬 控制电缆
Plasma cutting torch PMX105-04M control cable 等离子控制炬 PMX105-04M 二极炬 控制电缆
Plasma cutting torch PMX105-04M control cable 等离子控制炬 PMX105-04M 二极炬 控制电缆

1	Shield cap 保护帽
1.1	Shield cap 1/4" (6.35mm) 保护帽 1/4" (6.35mm)
1.2	Shield cap 1/4" (6.35mm) 保护帽 1/4" (6.35mm)
2	Shield cap 1/4" (6.35mm) 保护帽 1/4" (6.35mm)
3	Tip 喷嘴
3.1	Shield cap 1/4" (6.35mm) 1/4" (6.35mm) 保护帽 1/4" (6.35mm) 1/4" (6.35mm)
3.2	Shield cap 1/4" (6.35mm) 1/4" (6.35mm) 保护帽 1/4" (6.35mm) 1/4" (6.35mm)
4	Detachable nozzle 可拆卸喷嘴
4.1	Detachable nozzle PMX105-04M 1/4" (6.35mm) 可拆卸喷嘴 PMX105-04M 1/4" (6.35mm)
4.2	Detachable nozzle PMX105-04M 1/4" (6.35mm) 可拆卸喷嘴 PMX105-04M 1/4" (6.35mm)
5	Tip 喷嘴
5.1	Tip 1/4" (6.35mm) 喷嘴 1/4" (6.35mm)
5.2	Tip 1/4" (6.35mm) 喷嘴 1/4" (6.35mm)
5.3	Tip 1/4" (6.35mm) 喷嘴 1/4" (6.35mm)
5.4	Tip 1/4" (6.35mm) 喷嘴 1/4" (6.35mm)
6	Tip 喷嘴
6.1	Tip 1/4" (6.35mm) 喷嘴 1/4" (6.35mm)
6.2	Tip 1/4" (6.35mm) 喷嘴 1/4" (6.35mm)
7	Tip 喷嘴
7.1	Tip 1/4" (6.35mm) 1/4" (6.35mm) 喷嘴 1/4" (6.35mm) 1/4" (6.35mm)
7.2	Tip 1/4" (6.35mm) 1/4" (6.35mm) 喷嘴 1/4" (6.35mm) 1/4" (6.35mm)
7.3	Tip 1/4" (6.35mm) 1/4" (6.35mm) 喷嘴 1/4" (6.35mm) 1/4" (6.35mm)
7.4	Tip 1/4" (6.35mm) 1/4" (6.35mm) 喷嘴 1/4" (6.35mm) 1/4" (6.35mm)
7.5	Tip 1/4" (6.35mm) 1/4" (6.35mm) 喷嘴 1/4" (6.35mm) 1/4" (6.35mm)
8	Self ring PMX105-04M 1/4" (6.35mm) 1/4" (6.35mm)
9	Detachable nozzle
9.1	Detachable nozzle PMX105-04M 1/4" (6.35mm) 1/4" (6.35mm)
10	Plasma cutting torch 1/4" (6.35mm) 1/4" (6.35mm) 1/4" (6.35mm) 1/4" (6.35mm)
11	Plasma cutting torch 1/4" (6.35mm) 1/4" (6.35mm) 1/4" (6.35mm) 1/4" (6.35mm)
12	Plasma cutting torch 1/4" (6.35mm) 1/4" (6.35mm) 1/4" (6.35mm) 1/4" (6.35mm)
13	Plasma cutting torch 1/4" (6.35mm) 1/4" (6.35mm) 1/4" (6.35mm) 1/4" (6.35mm)
14	Plasma cutting torch 1/4" (6.35mm) 1/4" (6.35mm) 1/4" (6.35mm) 1/4" (6.35mm)
15	Plasma cutting torch 1/4" (6.35mm) 1/4" (6.35mm) 1/4" (6.35mm) 1/4" (6.35mm)
16	Plasma cutting torch 1/4" (6.35mm) 1/4" (6.35mm) 1/4" (6.35mm) 1/4" (6.35mm)
17	Plasma cutting torch 1/4" (6.35mm) 1/4" (6.35mm) 1/4" (6.35mm) 1/4" (6.35mm)



欧式快速接头—插头
The Style Cable Connector plug



欧式快速接头—插座式插座(铁双面)
The Style Cable Connector socket

Model	Current	Voltage
1000W	20A	20-25
1200W	25A	20-25
1500W	30A	20-25

Model	Current	Voltage
1000W	20A	20-25
1200W	25A	20-25
1500W	30A	20-25



欧式气电一体快速接头—插头
The Style Gas electric connector plug



欧式快速接头—插座式插座(铁双面)
The Style Gas electric connector socket

Model	Current	Voltage
1000W	20A	20-25
1200W	25A	20-25
1500W	30A	20-25

Model	Current	Voltage
1000W	20A	20-25
1200W	25A	20-25
1500W	30A	20-25



欧式快速接头—插头
The Style Cable Connector plug



欧式快速接头—插座式插座(铁双面)
The Style Cable Connector socket

Model	Current	Voltage
1000W	20A	20-25
1200W	25A	20-25
1500W	30A	20-25

Model	Current	Voltage
1000W	20A	20-25
1200W	25A	20-25
1500W	30A	20-25



欧式快速接头—插头
The Style Cable Connector plug



欧式快速接头—插座式插座(铁双面)
The Style Cable Connector socket

Model	Current	Voltage
1000W	20A	20-25
1200W	25A	20-25
1500W	30A	20-25

Model	Current	Voltage
1000W	20A	20-25
1200W	25A	20-25
1500W	30A	20-25



欧式快速接头—插头
The Style Cable Connector plug



欧式快速接头—插座式插座(铁双面)
The Style Cable Connector socket

Model	Current	Voltage
1000W	20A	20-25
1200W	25A	20-25
1500W	30A	20-25

Model	Current	Voltage
1000W	20A	20-25
1200W	25A	20-25
1500W	30A	20-25

国内快速插头—插座
Domestic Cable Connector-plug

规格	尺寸	重量
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25

国内快速插头—插座
Domestic Cable Connector-plug

国内快速插头—插座
Domestic Cable Connector-plug

规格	尺寸	重量
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25

国内快速插头—插座
Domestic Cable Connector-plug

国内快速插头—插座
Domestic Cable Connector-plug

规格	尺寸	重量
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25

国内快速插头—插座
Domestic Cable Connector-plug

欧式快速插头—插座
Euro Style Cable Connector-Socket

规格	尺寸	重量
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25

欧式快速插头—插座
Euro Style Cable Connector-Socket

国内快速插头—插座
Domestic Cable Connector-plug

规格	尺寸	重量
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25

国内快速插头—插座
Domestic Cable Connector-plug

欧式快速插头—插座
Euro Style Cable Connector-Socket

规格	尺寸	重量
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25

欧式快速插头—插座
Euro Style Cable Connector-Socket

国内快速插头—插座
Domestic Cable Connector-plug

规格	尺寸	重量
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25

国内快速插头—插座
Domestic Cable Connector-plug

欧式快速插头—插座
Euro Style Cable Connector-Socket

规格	尺寸	重量
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25

欧式快速插头—插座
Euro Style Cable Connector-Socket

国内快速插头—插座
Domestic Cable Connector-plug

规格	尺寸	重量
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25

国内快速插头—插座
Domestic Cable Connector-plug

欧式快速插头—插座
Euro Style Cable Connector-Socket

规格	尺寸	重量
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25
DKP-16	250A	25.25

欧式快速插头—插座
Euro Style Cable Connector-Socket

FEED ROLLS COMPATIBLE WITH BINZEL[®]



Stock Code	Description	Size	Colour
FR001-08V	V Groove	0.8mm-0.8mm	Natural
FR001-12V	V Groove	1.0mm-1.2mm	Natural
FR001-16V	V Groove	1.5mm-1.5mm	Natural
FR001-08U	U Groove	0.8mm-0.8mm	Natural
FR001-12U	U Groove	1.0mm-1.2mm	Natural
FR001-16U	U Groove	1.2mm-1.6mm	Natural



Stock Code	Description	Size	Colour
FR001-10K	K Groove	1.0mm	Natural
FR001-12K	K Groove	1.2mm	Natural
FR001-16K	K Groove	1.6mm	Natural



Stock Code	Description	Size	Colour
FR001-10X	X Groove	1.0mm	Natural
FR001-12X	X Groove	1.2mm	Natural
FR001-16X	X Groove	1.6mm	Natural



Stock Code	Description	Size	Colour
FR002-10K	K Groove	1.0mm	Natural
FR002-12K	K Groove	1.2mm	Natural
FR002-16K	K Groove	1.6mm	Natural

FEED ROLLS COMPATIBLE WITH THERMADYNE[®]



Stock Code	Description	Size	Colour
FR001-08V	V Groove	0.8mm-0.8mm	Natural
FR001-12V	V Groove	1.0mm-1.2mm	Natural
FR001-16V	V Groove	1.2mm-1.6mm	Natural
FR001-08U	U Groove	0.8mm-0.8mm	Natural
FR001-12U	U Groove	1.0mm-1.2mm	Natural
FR001-16U	U Groove	1.2mm-1.6mm	Natural



Stock Code	Description	Size	Colour
FR001-10K	K Groove	1.0mm	Natural
FR001-12K	K Groove	1.2mm	Natural
FR001-16K	K Groove	1.6mm	Natural

FEED ROLLS COMPATIBLE WITH LINCOLN[®]



Stock Code	Description	Size	Colour
FR004-08V	V Groove	0.8mm	Natural
FR004-12V	V Groove	1.2mm	Natural
FR004-16V	V Groove	1.6mm	Natural
FR004-08U	U Groove	0.8mm	Natural
FR004-12U	U Groove	1.2mm	Natural
FR004-16U	U Groove	1.6mm	Natural



Stock Code	Description	Size	Colour
FE006-10K	K Groove	1.0mm	Natural
FE006-12K	K Groove	1.2mm	Natural
FE006-14K	K Groove	1.4mm	Natural

FEED ROLLS COMPATIBLE WITH REHM®



Stock Code	Description	Size	Colour
FE005-08V	V Groove	0.8mm-0.8mm	Natural
FE005-12V	V Groove	1.0mm-1.2mm	Natural
FE005-16V	V Groove	1.2mm-1.6mm	Natural
FE005-08U	U Groove	0.8mm-0.8mm	Natural
FE005-12U	U Groove	1.0mm-1.2mm	Natural
FE005-16U	U Groove	1.2mm-1.6mm	Natural



Stock Code	Description	Size	Colour
FE005-10K	K Groove	1.0mm	Natural
FE005-12K	K Groove	1.2mm	Natural
FE005-14K	K Groove	1.4mm	Natural

FEED ROLLS COMPATIBLE WITH REHM®



Stock Code	Description	Size	Colour
FE006-08V	V Groove	0.8mm-0.8mm	Natural
FE006-12V	V Groove	1.0mm-1.2mm	Natural
FE006-16V	V Groove	1.2mm-1.6mm	Natural
FE006-08U	U Groove	0.8mm-0.8mm	Natural
FE006-12U	U Groove	1.0mm-1.2mm	Natural
FE006-16U	U Groove	1.2mm-1.6mm	Natural



Stock Code	Description	Size	Colour
FE006-10K	K Groove	1.0mm	Natural
FE006-12K	K Groove	1.2mm	Natural
FE006-14K	K Groove	1.4mm	Natural

FEED ROLLS COMPATIBLE WITH ESAB®



Stock Code	Description	Size	Colour
FE007-08V	V Groove	0.8mm-0.8mm	Black
FE007-12V	V Groove	1.0mm-1.2mm	Black
FE007-16V	V Groove	1.2mm-1.6mm	Black
FE007-08U	U Groove	0.8mm-0.8mm	Black
FE007-12U	U Groove	1.0mm-1.2mm	Black
FE007-16U	U Groove	1.2mm-1.6mm	Black



Stock Code	Description	Size	Colour
FE007-10K	K Groove	0.8mm-0.8mm	Natural
FE007-12K	K Groove	1.0mm-1.2mm	Natural
FE007-14K	K Groove	1.2mm-1.6mm	Natural

FEED ROLLS COMPATIBLE WITH KEMPP®



Stock Code	Description	Size	Colour
FE008-08V	V Groove	0.8mm	White
FE008-12V	V Groove	1.2mm	Red
FE008-16V	V Groove	1.6mm	Yellow



Stock Code	Description	Size	Colour
FE008-08U	U Groove	0.8mm	White
FE008-12U	U Groove	1.2mm	Red
FE008-16U	U Groove	1.6mm	Yellow



Stock Code	Description	Size	Colour
FE008-10K	K Groove	1.0mm	Blue
FE008-12K	K Groove	1.2mm	Red
FE008-16K	K Groove	1.6mm	Yellow



Stock Code	Description	Size	Colour
FE009-08V	V Groove	0.8mm-0.8mm	White
FE009-12V	V Groove	1.0mm-1.2mm	Red
FE009-16V	V Groove	1.2mm-1.6mm	Yellow



Stock Code	Description	Size	Colour
FE009-08U	V Groove	0.8mm-0.8mm	White
FE009-12U	V Groove	1.0mm-1.2mm	Red
FE009-16U	V Groove	1.2mm-1.6mm	Yellow



Stock Code	Description	Size	Colour
FE009-08K	K Groove	0.8mm-0.8mm	White
FE009-12K	K Groove	1.0mm-1.2mm	Red
FE009-16K	K Groove	1.2mm-1.6mm	Yellow



Stock Code	Description	Size	Colour
FE010-10V	V Groove	1.0mm	Blue
FE010-12V	V Groove	1.2mm	Red
FE010-16V	V Groove	1.6mm	Yellow



Stock Code	Description	Size	Colour
FR010-10U	U Groove	1.0mm	Blue
FR010-12U	U Groove	1.2mm	Red
FR010-16U	U Groove	1.6mm	Yellow



Stock Code	Description	Size	Colour
FR010-10K	K Groove	1.0mm	Blue
FR010-12K	K Groove	1.2mm	Red
FR010-16K	K Groove	1.6mm	Yellow



Stock Code	Description	Size	Colour
FR011-10V	V Groove	1.0mm	Blue
FR011-12V	V Groove	1.2mm	Red
FR011-16V	V Groove	1.6mm	Yellow



Stock Code	Description	Size	Colour
FR011-10U	U Groove	1.0mm	Blue
FR011-12U	U Groove	1.2mm	Red
FR011-16U	U Groove	1.6mm	Yellow



Stock Code	Description	Size	Colour
FR011-10K	K Groove	1.0mm	Blue
FR011-12K	K Groove	1.2mm	Red
FR011-16K	K Groove	1.6mm	Yellow

FEED ROLLS COMPATIBLE WITH FRONIUS®



Stock Code	Description	Size	Colour
FR012-10V	V Groove	1.0mm	Black
FR012-12V	V Groove	1.2mm	Black
FR012-16V	V Groove	1.6mm	Black



Stock Code	Description	Size	Colour
FR012-10U	U Groove	1.0mm	Black
FR012-12U	U Groove	1.2mm	Black
FR012-16U	U Groove	1.6mm	Black

FEED ROLLS COMPATIBLE WITH KEMPPİ®



Stock Code	Description	Size	Colour
FR012-08K	K Groove	0.8mm	Black
FR012-12K	K Groove	1.2mm	Black
FR012-16K	K Groove	1.6mm	Black

FEED ROLLS COMPATIBLE WITH KEMPPİ®



Stock Code	Description	Size	Colour
FR013-08V	V Groove	0.8mm	Blue
FR013-12V	V Groove	1.2mm	Red
FR013-16V	V Groove	1.6mm	Yellow



Stock Code	Description	Size	Colour
FR013-08U	U Groove	1.0mm	Blue
FR013-12U	U Groove	1.2mm	Red
FR013-16U	U Groove	1.6mm	Yellow



Stock Code	Description	Size	Colour
FR013-08K	K Groove	1.0mm	Blue
FR013-12K	K Groove	1.2mm	Red
FR013-16K	K Groove	1.6mm	Yellow

快速接头 QUICK CONNECTORS



EURO-TYPE /TEFLON 欧式特氟龙送丝管



Yellow $\Phi 1.2-1.6\text{mm}$

黄色特氟龙送丝管

Teflon liner $\Phi 3.0 \times 4.5\text{mm}$

L	Code	Ref.	Pack
3.5m	0210	126.0038	1
4.5m	0210	126.0042	1
5.5m	0217	126.0045	1
200m	0677		1

Blue $\Phi 0.6-0.9\text{mm}$

蓝色特氟龙-钢送丝管

Teflon liner $\Phi 4.0 \times 1.5\text{mm} + \text{terminator}$

L	Code	Ref.	Pack
3.5m	0280		1
4.5m	0286		1
5.5m	0287		1

Red $\Phi 1.0-1.2\text{mm}$

红色特氟龙-钢送丝管

Teflon liner $\Phi 2.0 \times 4.0\text{mm} + \text{terminator}$

L	Code	Ref.	Pack
3.5m	0285		1
4.5m	0281		1
5.5m	0282		1

Yellow $\Phi 1.2-1.6\text{mm}$

黄色特氟龙-钢送丝管

Teflon liner $\Phi 3.0 \times 4.5\text{mm} + \text{terminator}$

L	Code	Ref.	Pack
3.5m	0280		1
4.5m	0286		1
5.5m	0287		1

EURO-TYPE /GRAPHTE 欧式石墨尼龙送丝管



$\Phi 1.0-1.2\text{mm}$

石墨尼龙送丝管+钢送丝管

Graphite liners $\Phi 4.0 \times 2.0\text{mm} + \text{Terminator}$

L	Code	Ref.	Pack
3.5m	0275		1
4.5m	0271		1
5.5m	0272		1
200m	0668		1

$\Phi 1.2-1.6\text{mm}$

石墨尼龙送丝管+钢送丝管

Graphite liners $\Phi 4.7 \times 2.7\text{mm} + \text{Terminator}$

L	Code	Ref.	Pack
3.5m	0281		1
4.5m	0292		1
5.5m	0293		1
200m	0669		1

CASING



产品包装款式

PRODUCT PACKAGING PICTURE STYLE

WELCOME TO JOIN US